

Bostwick Folding Gates

FIXED TOP TRACK & BOTTOM TRACK





SINGLE GATE 16' MAXIMUM WIDTH

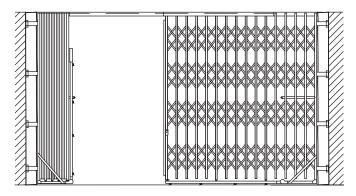

DOUBLE GATE 20' MAXIMUM WIDTH

Product Code	Double or Single Gate			Deep Cabinet		Standard Height
5766D	Double		Χ		38' max.	3'6" to 12'
5766S	Single		X		19' max.	3'6" to 12'
5765D	Double			Χ	38' max.	3'6" to 12'
5765S	Single			Χ	29' max	3'6" to 12'
5744D	Double	Χ			8' to 38'	3'6" to 12'
5744S	Single	Χ			5' to 20'	3'6" to 12'



For use in entryways, Acorn Wire + Iron Works Bostwick Folding Gates offer another layer of break-in defense to locked institutional building doors. All models are available in a wide range of standard heights to custom fit virtually any doorway.

SPECIFICATIONS

• Channels: 0.75" spaced vertically not over 6" O.C.

• Lattice Bars: 0.625" x 0.1875"

• End Bars: Fully enclosed

• Moving Parts: Fitted with rollers

• Material: Cold-rolled

• Locks: Hasp for padlock or cylinder lock

• **Top Guide:** 2.375" x 2.25" channel, the bottom track has gusset braces & rubber floor rests

• Warranty: 5 year

APPLICATIONS

• Entrances, Hallways + Stairways

• Cafeterias + Dormitories

Libraries + Laboratories

• Gymnasiums + Stadiums

• Lecture Halls + Auditoriums

· Administrative Offices

• Utility + Maintenance Rooms

• Shipping + Loading Docks



ww.Cannon, Inc.

Design. Layout. Build. Install.

1-800-442-3061 www.wwcannon.com

Cabinets

STACKED WIDTH (approximate)

SINGLE DEEP CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	17	21	31	35	37	42	44

SINGLE SHALLOW CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	18	21	24	32	35	38	42

STYLES



Surface Mounted Shallow Cabinet



Recessed Shallow Cabinet



Surface Mounted Deep Cabinet



Recessed Deep Cabinet

DOUBLE DEEP CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	9	11	16	18	19	21	22

DOUBLE SHALLOW CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	9	11	12	16	18	19	21

SPECIFICATIONS

- Material: 0.1875" cold-rolled Z bar frames with 16-gauge steel backs
- Edges: Formed 'C' edges on flush 16-gauge door
- Special Gate Hinges: Permit cabinet doors to close & lock when gate is in both stacked & extended position
- Gate & Cabinet Locks: 0.46875" diameter 5 pin tumbler mortise cylinders keyed alike, or master keyed to building
- Gate & Cabinet Finish: Standard, color as selected

Finishes & Options

POWDER COATED COLORS



Custom colors available. Contact us for a consultation or samples. Premium price applies for white & yellow.

Colors shown in print may not be an exact representation of the true product color.

LOCKS

SAFETY & EXIT DEVICE OPTIONS

For School & Fire Code requirements

COLLAPSIBLE EMERGENCY EXIT DEVICE

OHIO EMERGENCY DEVICE

WIRE MESH SIDE PANEL ADDITIONS











Bostwick Folding Gates

FOLDING TOP TRACK & BOTTOM TRACK





SINGLE GATE 16' MAXIMUM WIDTH

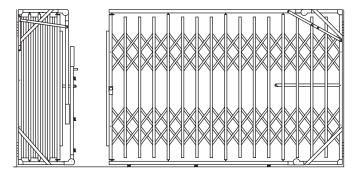

DOUBLE GATE MAXIMUM WIDTH

Product Code	Double or Single Gate		Shallow Cabinet	Deep Cabinet		Standard Height
5743D	Double	Χ			25' max	7' & 7'6"
5743S	Single	X			16' max	7' & 7'6"
5761D	Double		Χ		25' max.	7' & 7'6"
5761S	Single		Χ		16' max.	7' & 7'6"
5762D	Double			Χ	25" max.	7' & 7'6"
5762S	Single			Χ	16' max.	7' & 7'6"

FEATURES

Bostwick Folding Gates for school applications control corridor traffic. When partially closed, gates limit main traffic flow during after-school sporting events and other activities. When fully expanded, gates create a sturdy blockade from unwanted access.

Also for use in entryways, these gates offer another layer of break-in defense to locked school doors. All fixed security folding gates can be locked into place in both the stacked and extended positions for greater security control.

SPECIFICATIONS

• Channels: 0.75" spaced vertically not over 6" O.C.

• Lattice Bars: 0.625" x 0.1875"

• End Bars: Fully enclosed

• Moving Parts: Fitted with rollers

• Material: Cold-rolled

• Locks: Hasp for padlock or cylinder lock

 Hinged Top & Bottom Tracks: Gusset braces in all corners, fixed support for top track & rubber floor rests for bottom

• Warranty: 5 year

APPLICATIONS

- Entrances, Hallways + Stairways
- Cafeterias + Dormitories
- Libraries + Laboratories
- Gymnasiums + Stadiums
- Lecture Halls + Auditoriums
- Administrative Offices
- Utility + Maintenance Rooms
- Shipping + Loading Docks





Cabinets

STACKED WIDTH (approximate)

SINGLE DEEP CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	17	21	31	35	37	42	44

SINGLE SHALLOW CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	18	21	24	32	35	38	42

STYLES



Surface Mounted Shallow Cabinet



Recessed Shallow Cabinet



Surface Mounted Deep Cabinet



Recessed Deep Cabinet

DOUBLE DEEP CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	9	11	16	18	19	21	22

DOUBLE SHALLOW CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	9	11	12	16	18	19	21

SPECIFICATIONS

- Material: 0.1875" cold-rolled Z bar frames with 16-gauge steel backs
- Edges: Formed 'C' edges on flush 16-gauge door
- Special Gate Hinges: Permit cabinet doors to close & lock when gate is in both stacked & extended position
- Gate & Cabinet Locks: 0.46875" diameter 5 pin tumbler mortise cylinders keyed alike, or master keyed to building
- Gate & Cabinet Finish: Standard, color as selected

Finishes & Options

POWDER COATED COLORS



Custom colors available. Contact us for a consultation or samples. Premium price applies for white & yellow.

Colors shown in print may not be an exact representation of the true product color.

LOCKS

SAFETY & EXIT DEVICE OPTIONS

For School & Fire Code requirements

COLLAPSIBLE EMERGENCY EXIT DEVICE

OHIO EMERGENCY DEVICE

WIRE MESH SIDE PANEL ADDITIONS







