




ORIGINAL (STRUCTURAL ANGLE) WIRE MESH PARTITION

EXAMPLE:

Typical 3'W x 7'H (+ 1' transom panel) service wicket shown here

Panel configuration and quantity will vary based on gate dimensions.

Assembly instructions are specific to the size and material of your gate. See Installation Manual for complete details.



SERVICE WICKET GATE

Description


Cogan's service wicket gate acts as a service counter. The top portion of the door swings open, while the bottom portion remains fixed to restrict free access to the partition. All service wicket gates are equipped with a padlock hasp, hinges and door stoppers. Additional lock options are also available. Doors are made of 2" x 2" x 10 GA welded wire mesh framed in 1 1/4" x 1 1/4" x 12GA structural angle with two welded 1/2" ø reinforcement rods from center to the

PRODUCT INFORMATION

Specifications

Door Heights	7' and 7' with 1' Transom			
Type of Door	Service Wicket Gate			
Door Stop	Installed on the door with the spring lock			
Finish	Powder-coated			
Mesh Size	2" x 2" x 10GA			
Materials Mesh	Steel Wire			
Frame Material	Structural Angle 1 1/4" x 1 1/4" x 12GA			
Type of Closure	Padlock Hasp, Spring Lock			
Stiffening profile	1/2" Ø Reinforcement rod			



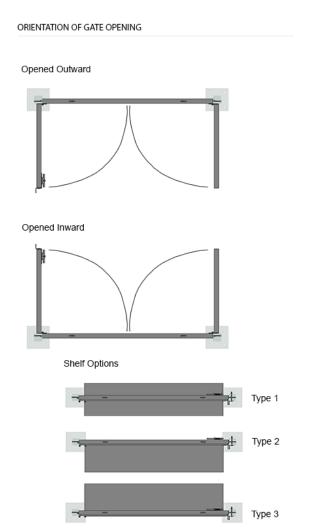






ORIGINAL (STRUCTURAL ANGLE) WIRE MESH PARTITION

SIZES

Please consult the table below for a complete list of dimensions.

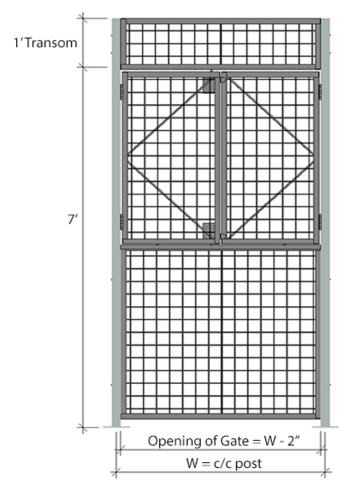

H	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"
7'-0"	/	/	/	/	/
7'-0" + 1' transom	/	/	/	/	/

✓ Indicates gate dimension is available.

—— Indicates gate dimension is not available.