

# 26"

# HIGH VELOCITY FAN



STANDARD  
**YM - YOKE MOUNT**

ADDITIONAL MOUNTING OPTIONS:



**RM** Rack Mount

103 lbs



**CW** Column-Wall

113 lbs



**PS** Portable Stroller

129 lbs



**PB** Pedestal Base

108 lbs

**SHIPPING WEIGHT:**

SIZE	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	SHIPPING WEIGHT
			W	D	ID		
26"	7650	1	33"	18.5"	27"	150'	93 lbs

## FEATURES


- Propeller:** 26" Diameter, 3 Blade GalvAlum, 18°
- Fan Inlet/Outlet:** 14 Gauge Spun Steel
- Finger Guards:** OSHA Compliant, Spiral Wound Steel
- Power Cord (115V Only):** 12' Length (Switch Optional)
- RPM:** 1800\*/1200
- Decibels:** 80.8 @ 20' - 85.2 @ 3' (1800)  
75.7 @ 20' - 81.3 @ 3' (1200)
- Coverage:** 6100 ft<sup>2</sup>
- Warranty:** 2 Years

## MOTOR

VOLTAGE	MOTOR AMPS	RUNNING AMPS
115V/208-230V	13.4/6.8-6.7	12.9/6.6-6.5
208-230/460V*	3.6-3.5/1.8	3.4-3.3/1.7
277V	5.6	5.4

- Enclosure:** TEAO Standard
- Frame:** 56
- Ambient Temperature:** 104°F
- Duty Cycle:** Continuous

\*standard

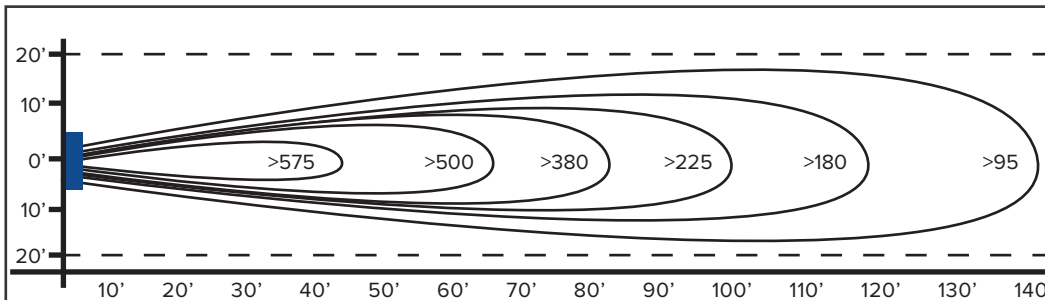

## AIR FLOW PATTERN

Above velocities shown in feet/minute.