

DEA APPROVED STORAGE

WireCrafters

w.w.Cannon, llc.

Design. Layout. Build. Install.

1-800-442-3061

www.wwcannon.com

CONTROLLED SUBSTANCE DRUG STORAGE CAGES

Title 21 CFR Sections 1301.72-1301.76 Compliant

IDEAL FOR

Pharmaceutical Distribution Centers | Wholesale Distribution Centers | Pharmaceutical Manufacturing Facilities



Meets DEA Standards for Class III, IV & V Controlled Substances

- Wall and ceiling panels constructed in a 10 GA wire woven in a 2" x 1" rectangular mesh
- Wall panels mount to posts flush to floor
- Self-closing, self-locking doors
- Hardware is only accessible from inside of cage
- Clear spanned ceilings up to 30' or extended heights to roof decks
- Heavy 3/8" mounting hardware and anchors provided
- Hardware must be pinned or brazed (Tamper-proof hardware also available)

Special Customization and Options Available

- Custom heights available up to 50'-0" that span to roof decks
- Special door locks available including push bars, electric locks and mag locks with slide doors
- Electric strikes compatible with most card reader systems are optional

WireCrafters offers these features, plus years of experience providing approved enclosures to the drug industry. Let us help with your next project. Call today for a free consultation.



WWCANNON.COM | (800) 442-3061 | SALES@WWCANNON.COM |

When properly installed, WireCrafters Style 840 Partitions meet the US Drug Enforcement Administration's requirements for physical security of Schedule III through V controlled substances as outlined in Title 21 CFR Sections 1301.72-1301.76 physical security controls. Schedule III through V controlled substances require a high level of security. Such installations have the following notable features:

Doors must be self-closing and self-locking. WireCrafters offers a number of standard and custom lock options to meet this requirement, as well as a line of self closing doors with mechanical and powered operators.

Panels mount flush to floor. Standard posts are 2" square with base plates for floor anchoring welded to each. Lag bolts need to be pinned or brazed once installed.

Shall have a ceiling of same materials, or erected to reach the structural ceiling of the building. WireCrafters system uses the same panels in walls and ceilings. Furthermore, our system is so strong, panels can be stacked between posts to reach most any building ceiling.

WireCrafters standard panels are maximum 10 feet long, 4 or 5 feet tall. The frames of our panels satisfy the requirement for horizontal reinforcement every 60 inches.



CODED ACCESS



ELECTROMAGNETIC



ELECTRIC STRIKE




CARD READER



KEY PAD



BIOMETRICS

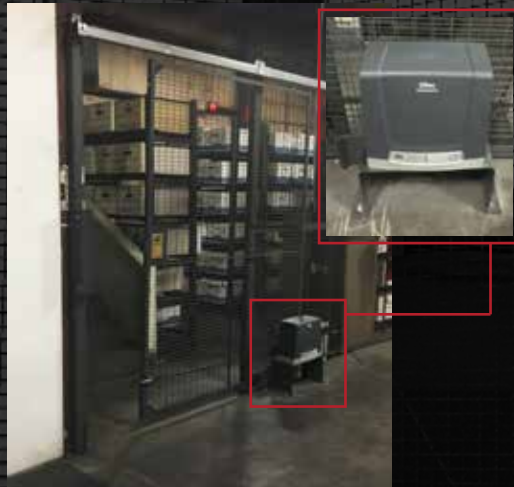


ELECTRIC DOOR OPENER

For sliding doors greater than 80 square feet, we supply an electric opener. Electric door openers use a standard 110 volt, single phase, electric motor that is chain driven. This allows you to open your DEA Approved storage with a remote control.

- Radio frequency remote controls
- Self-closing timer
- Anti-crush safety switch
- Photo eye safety switch
- Stationary push button control
- Electromagnetic locks optional

WIRE CAGE CUTOUTS

Cutouts allow for complete customization, so your storage area fits against walls and other obstacles while remaining secure.

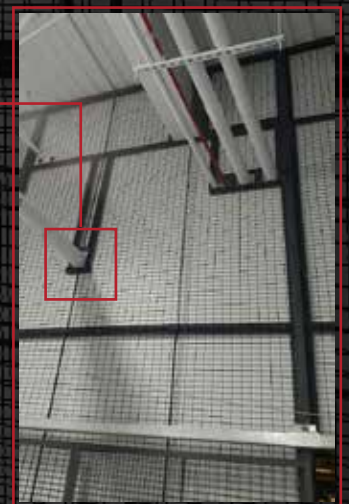

CEILING PANELS

Clear spanned ceilings of up to 30' or extended heights to roof decks conform to all DEA requirements.

