


Cotterman®

A D J U S T A B L E
S E L F - C L O S I N G
SAFETY GATE



**MEETS OSHA 1910 Subpart D
and ANSI-A1264.1**

PRODUCT FEATURES

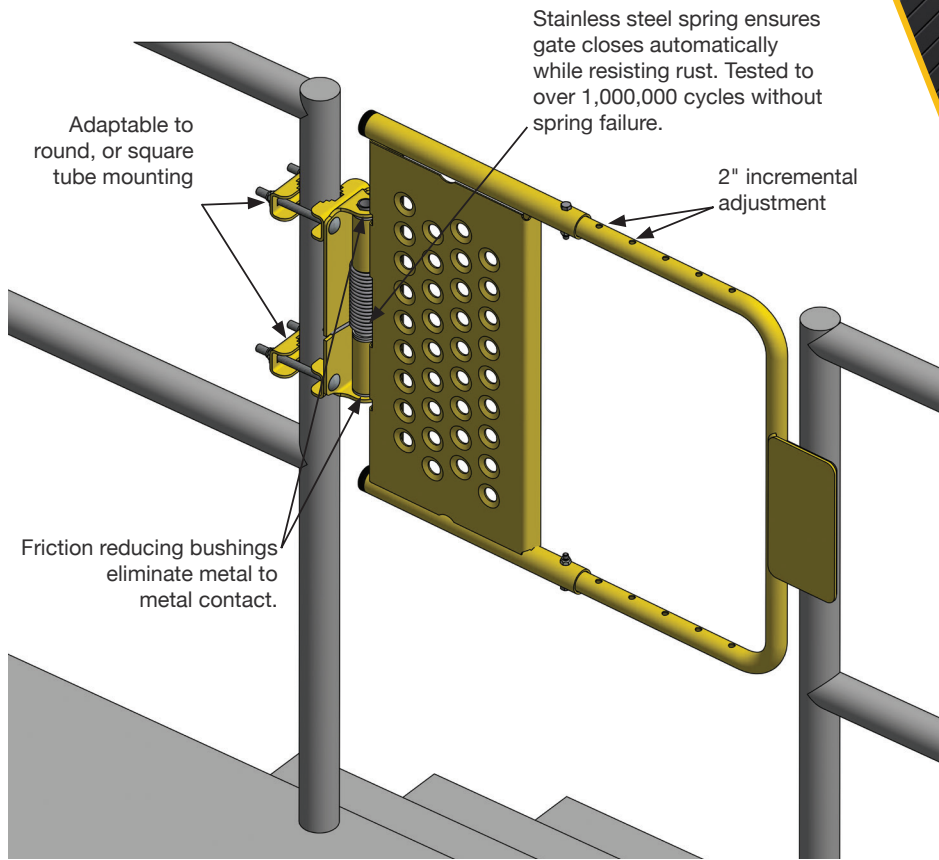

ADJUSTABLE SELF-CLOSING SAFETY GATE

ADJUSTABLE

Two sizes cover openings from 16" to 40" openings. Mounts to round or square guardrail systems or to any reinforced flat mounting surface, by simple bolt-on attachment. **Left or Right opening.**

SELF-CLOSING

Tested to over 1,000,000 cycles without spring failure.

CORROSION RESISTANT

Two-part powder-coat finish, zinc rich primer with UV resistant polyester top coat. Available Galvanized or Stainless Steel models provide corrosion resistance.

OSHA COMPLIANT

Cotterman® Self-Closing Safety Gates meet or exceed the guardrail opening protection requirements of OSHA 1910 Subpart D and ANSI A1264.1-2017.



- Versatile, can be mounted to round rail, square rail of up to 2", or a firm reinforced wall surface.
- Stainless steel spring closes the gate after each pass thru.
- Gate width is available in two adjustable size ranges: to fit openings of 16" to 24" or 24" to 40". Gate width is adjustable in 2" increments.
- Available in safety yellow powder coated finish with zinc rich powder coat primer for corrosion resistance, hot-dip galvanized, or stainless steel construction.



Tested to over 1,000,000 cycles without spring failure. Stainless Steel spring ensures gate closes automatically while resisting rust.



Friction reducing bushings provide smooth operation and long life, eliminating metal to metal contact.

Item No.	Fits Clear Opening	Finish
SG1626ZC2P1S	16" - 26"	Safety yellow powder top coat*
SG2440ZC2P1S	24" - 40"	Safety yellow powder top coat*
SG1626SP1S	16" - 26"	Stainless Steel
SG2440SP1S	24" - 40"	Stainless Steel
SG1626C51P1S	16" - 26"	Galvanized
SG2440C51P1S	24" - 40"	Galvanized

*zinc rich powder-coat primer


Application: Intended for use with OSHA approved 42" guardrail systems. Cotterman® Adjustable Self Closing Safety Gates meet OSHA 1910 Subpart D, and ANSI-A1264.1.

Cotterman®

www.cotterman.com • info@cotterman.com

130 Seltzer Rd.
Croswell, MI 48422
810-679-4400 • FAX 810-679-4510
TOLL FREE 800-5-LADDER
8 A.M. – 5 P.M. MON. THRU FRI.
(EASTERN TIME)

Cotterman®

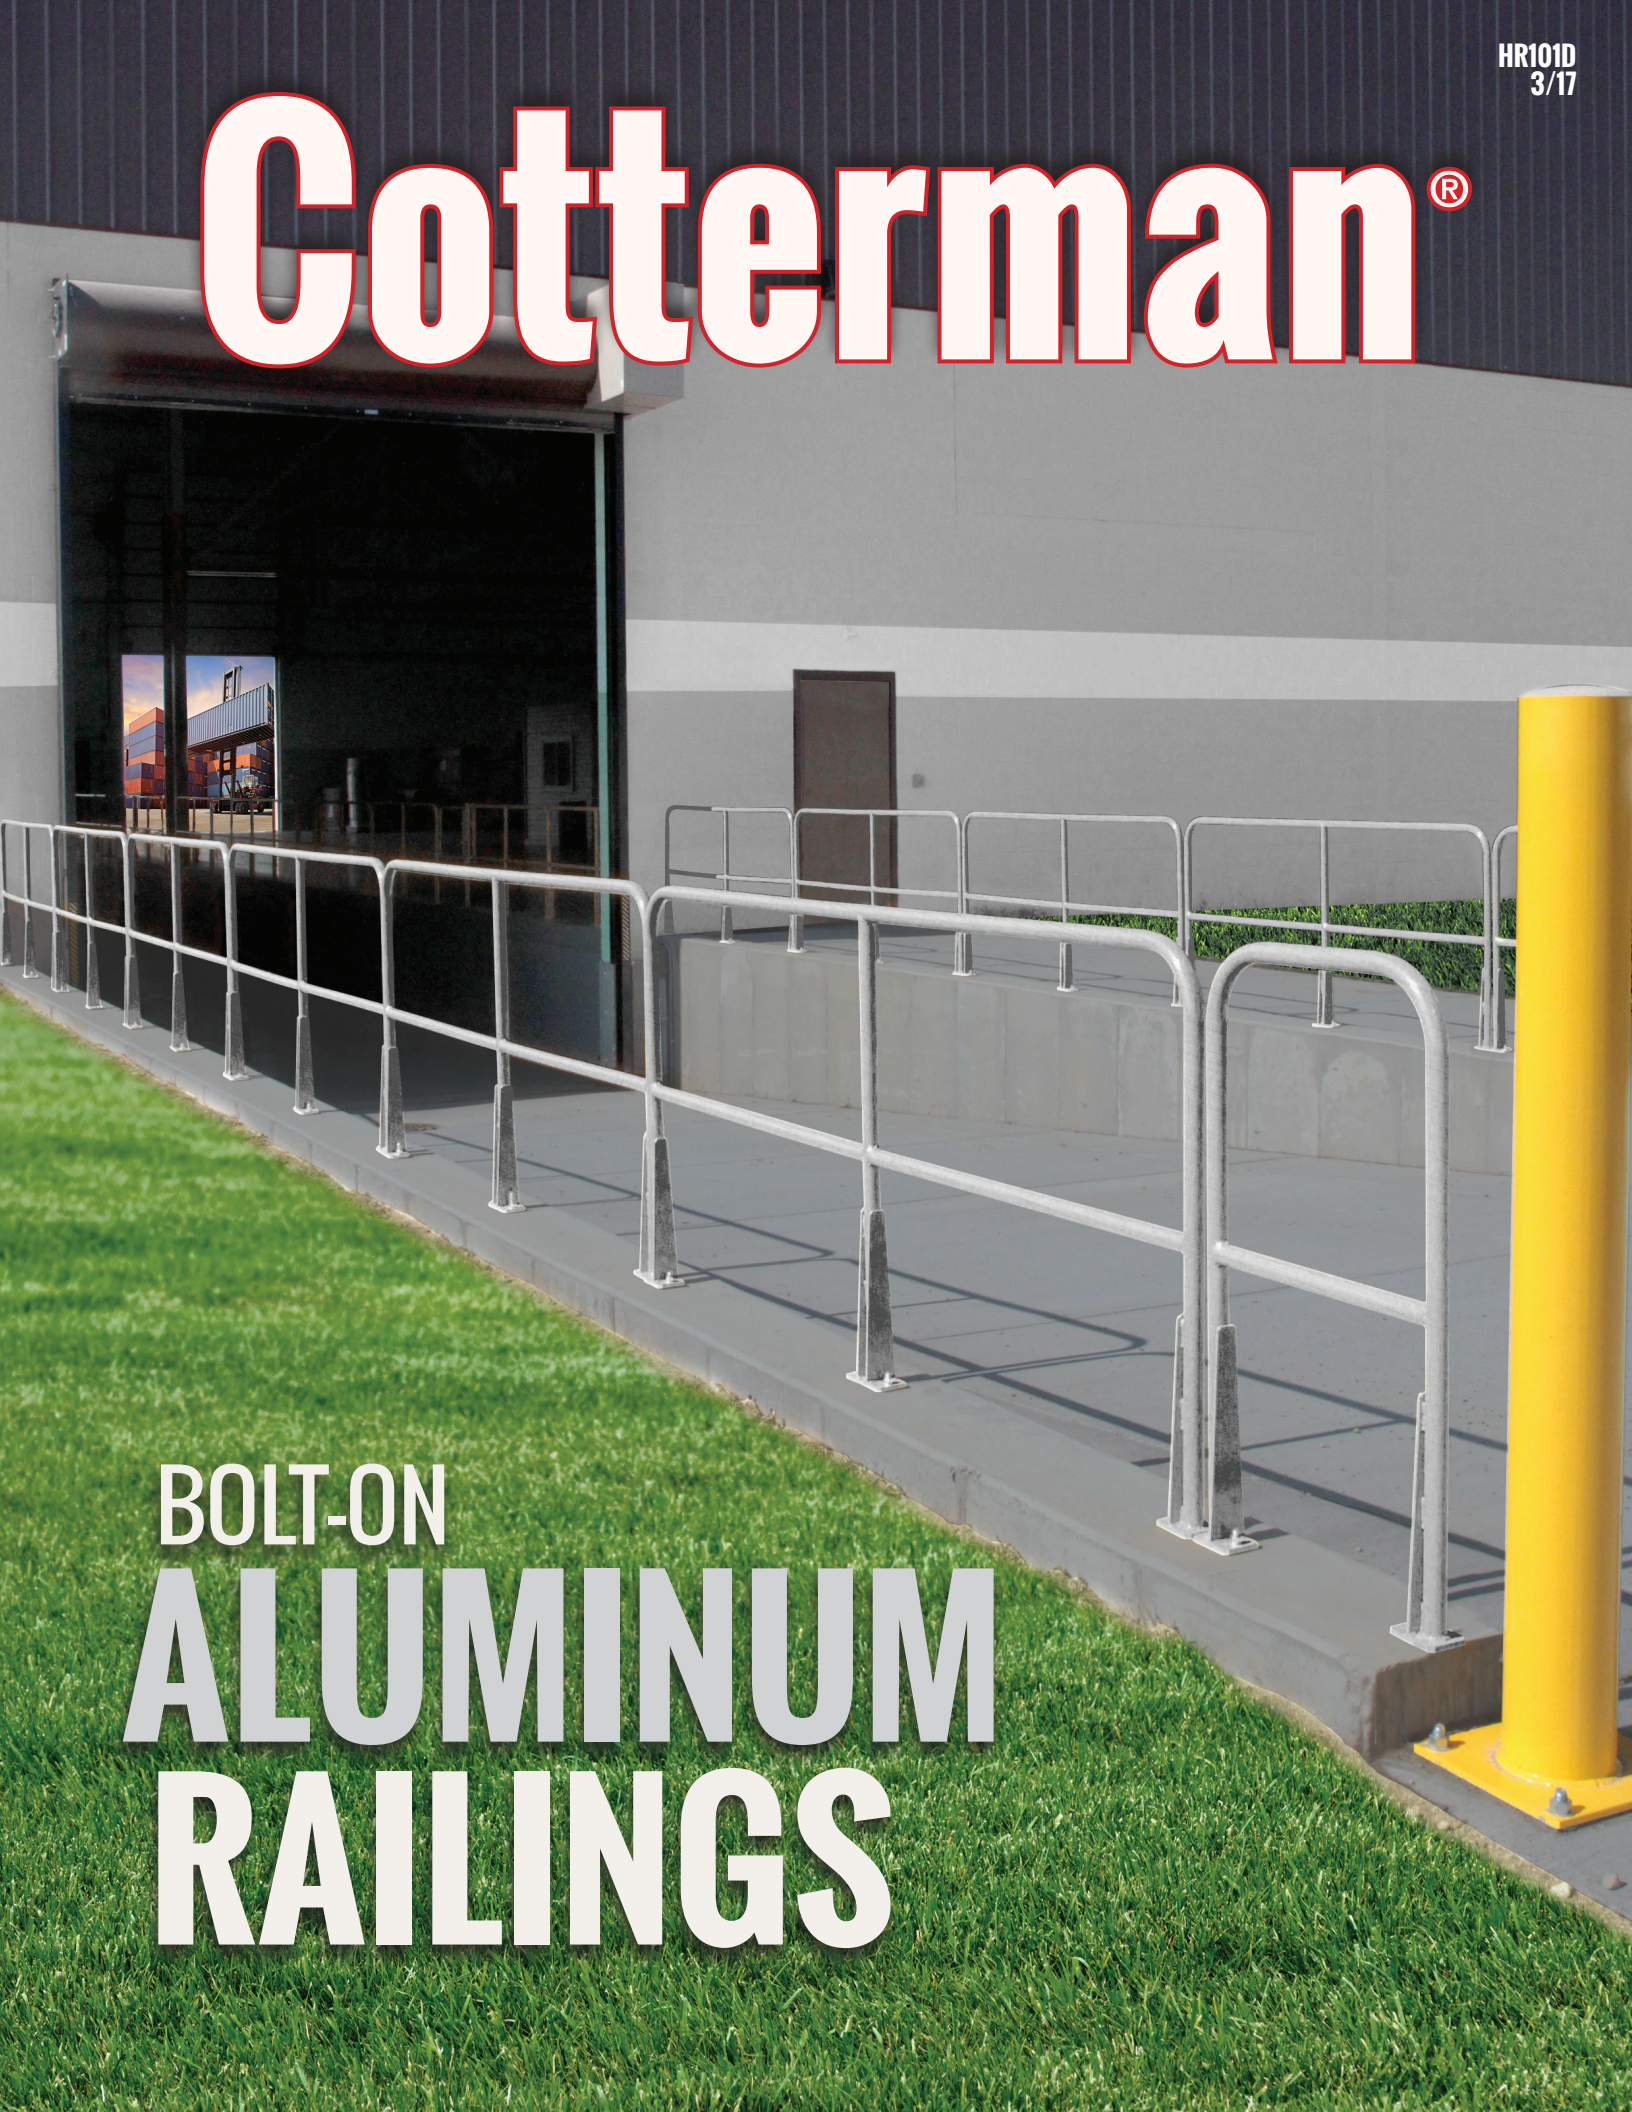

BOLT-ON
**ALUMINUM
RAILINGS**



BOLT-ON ALUMINUM RAILINGS

PRODUCT FEATURES


- Aluminum one-piece welded construction
 - 1½" diameter tube
 - 42" high with mid-rail
 - Corrosion resistant
 - Non-magnetic
 - Mill finish
 - Mounting feet have 9/16" diameter holes for bolt-on field installation
 - Mounting hardware not included
 - Available in choices of 7 lengths, 2' through 8'
 - Choose a combination of models for distances greater than 8'
 - Meets applicable OSHA standards
- FO.B. Crowell, MI
 - Lead-time: 10 working days A.R.O.
 - Terms: net 30 Days
 - Pricing subject to change without notice

WITHOUT TOE-BOARDS

RAILING LENGTH	MODEL NO.
2'	AR2
3'	AR3
4'	AR4
5'	AR5
6'	AR6
7'	AR7
8'	AR8

WITH 4" TOE-BOARDS

RAILING LENGTH	MODEL NO.
2'	AR2T
3'	AR3T
4'	AR4T
5'	AR5T
6'	AR6T
7'	AR7T
8'	AR8T

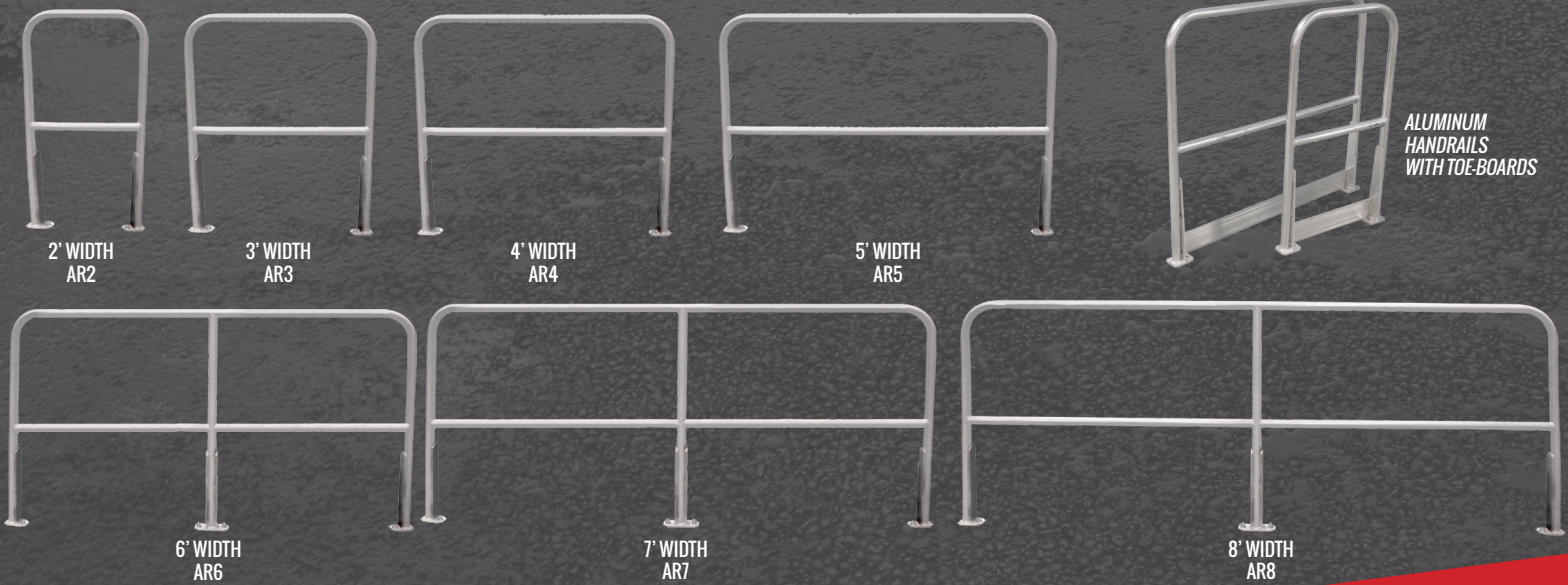

ALUMINUM
HANDRAILS
WITH TOE-BOARDS

2' WIDTH
AR2

3' WIDTH
AR3

4' WIDTH
AR4

5' WIDTH
AR5

6' WIDTH
AR6

7' WIDTH
AR7

8' WIDTH
AR8

Cotterman[®]
www.cotterman.com • info@cotterman.com

