

YellowGate

One Gate. Fits All. Stops Falls.

Industrial Swing Gate Fall Protection



Easily adjusts from
16"[406mm] wide to **36"**[914mm]



Authorized
Distributor

YellowGate® Fall Protection

The Most Adjustable Swing Gate Available

- Universal mount for easy installation – no additional parts to order
- Helps meet OSHA regulations
- Durable - built to last indoors and out
- In-stock and ready-to-ship



YellowGate




EASILY ADJUSTS FROM 16" [406mm] WIDE TO 36" [914mm]

Minimum width of YellowGate® unit:
16" in perpendicular configuration,
19.5" in parallel configuration.

Malbec Tensioner
No spring to fail.



UNIVERSAL MOUNT 

Order a pallet of **10** today

YellowGate XL

Fork truck and Dock gates
Adjustable from 6 to 12' and 42" in height

Malbec Tensioner
No spring to fail.

The Malbec Tensioner eliminates the need for a swing gate's most common failure point, the spring. Our swing gate provides field adjustable tension and maintenance free closure, every time.

YellowGate® can swing either in or out by simply relocating two bolts.

Parallel Mounting Option

Perpendicular Mounting Option

Authorized Distributor

YellowGate **XL**

YellowGate Protection, only **BIGGER** Part No. 108490-XL



Each component is proudly crafted in our South Carolina facility.

On-site adjustable tension spring.

Three points of adjustment for optimized balance, light touch, smooth operation and easy action movement.


Powder coated safety yellow

The Most Adjustable Barrier Gate Available.

OSHA Compliant
Part No. 108490-XL

Durable weather protection design

Ultra lightweight.

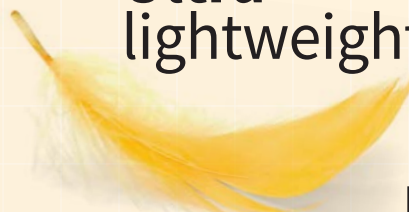

Lifts and lowers almost effortlessly.

52" [1321 mm]

26" [660 mm]

11" [279 mm]

42" [1067 mm]

90° movement

▲ Easy action movement

PRODUCT KEY FEATURES:

- ▶ Adjustable from 6' [1829 mm] - 12' [3658 mm], 42" [1067 mm] height
- ▶ Powder coated safety yellow
- ▶ Aluminum extruded, laser precision manufactured
- ▶ Lightweight and easy to raise and lower
- ▶ Maintenance free ergonomic design
- ▶ Locking pin for both the open and closed positions

Available Power Option

Available with an optional 24 volt powered lift assist system, requiring a 120 volt power supply.

- Standard 50 ft. (customer to cut to desired length) cable run from controller to gate. (max. 150 ft.)
- Retro-fitable to existing manual YGXL rev3 models.
- Easy installation with basic tools
- Some electrical connection by customer required
- 15- 20 second, 90 degree raise or lower

Easily adjusts in the field from ▶
6' (1829 mm) to 12' (3658 mm)


YellowGate RS



Each component is proudly crafted in our South Carolina facility.



YellowGate RS Connector Accessories

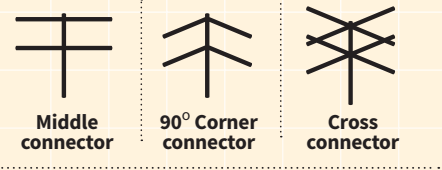


42"
(1067mm)

PRODUCT KEY FEATURES:


- ▶ No Tools required. Rail anchors use quick release stainless steel pins
- ▶ Field adjustable and mobile
- ▶ OSHA Compliant 42" height
- ▶ Powder coated safety yellow
- ▶ Aluminum extruded, laser precision manufactured parts
- ▶ Maintenance free ergonomic design



▶ **No Tools required.**
Quick release pins



▶ **Highly Mobile** with 5" rubber wheels



▶ **Simple male to female** connectors



Look for our rooftop railing configurator
COMING SOON!

Order Today!

PRODUCT	SKU#
T Base	Part No. 50732
Wheel Base.....	Part No. 50739
Handrail LH	Part No. 50734
Handrail RH.....	Part No. 50735
Handrail Corner.....	Part No. 50736
Handrail Cross	Part No. 50737
Handrail Middle.....	Part No. 50738

YellowGate **RS**

Product Applications



- ▶ Simple design, for re-purposing rails for constantly changing structures and situations.
- ▶ No tools required. Quick release pins are used to attach the handrails to the base

- ▶ Only 3 individual handrail components
- ▶ Meets OSHA regulations: 1910.23 (e)(1); 1910.23 (e)(3)(ii); 1910.23 (e)(3)(iv); 1910.144 (a)(3) "yellow"

- ▶ 2" (51mm) handrail diameter
- ▶ Highly Mobile with 5" (127mm) rubber wheels
- ▶ Maintenance free ergonomic design