



## PALLET DROP ZONE SAFETY GATE

Gain safe access to palletized materials at elevated levels with Wildeck's Pallet Drop Zone (DZ) Safety Gate. When one side of the DZ gate is raised, the other closes, keeping your elevated ledge protected at all times. The DZ gate can be custom designed on all three dimensional planes to fit within rack bays and other work areas where space optimization is key.


### Highlights

- Transform loading areas into protected, gated systems
- Pivoting arms swing outside gate panels to maximize storage space for pallet loads
- OSHA / Cal-OSHA compliant
- Easily install onto new or existing rack uprights
- Also available as a freestanding unit (*displayed right*)




### HOW IT WORKS

When one side of the Pallet Drop Zone (DZ) Gate is raised, the other closes, keeping your elevated ledge protected at all times. In contrast to similar double-sided gate designs, the DZ gate utilizes more than one pivot point on the pivoting arms. This results in vertical articulating movement that extends the swing radius of the gate arms, maximizing vertical and horizontal clearance for pallet loads. The Pallet Drop Zone Gate can be installed directly onto rack structures, or by itself as a freestanding unit bolted to the deck. All DZ gate dimensions can be custom designed, providing flexibility to fit within work areas where space is limited.

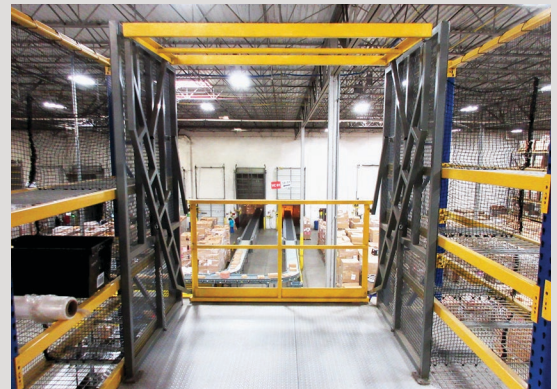

# PALLET DROP ZONE SAFETY GATE

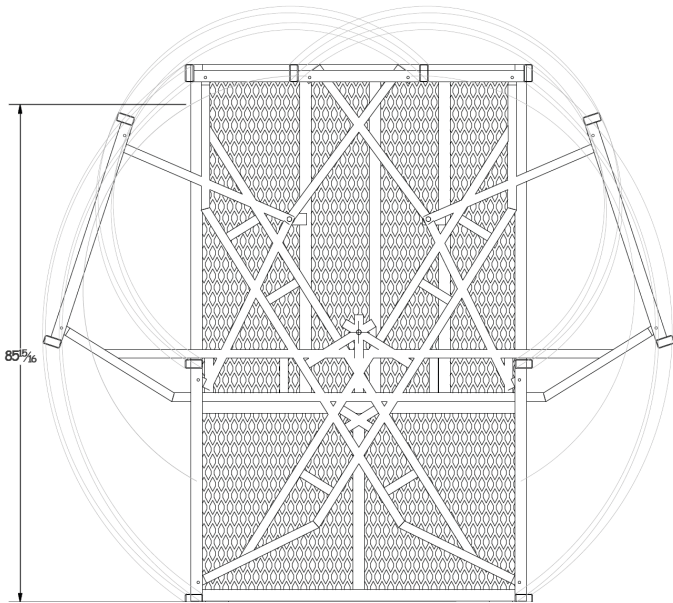


**Pallet Drop Zone Gate swing path**

NOTE: Arms swing above (and outside) of gate panels. The pivot point locations vary based on width and depth of gate model. Consult with a Wildeck representative for the space requirements of your model number.

## SPECIFICATIONS

- Clearance available (standard models): 54" D x 86" H; horizontal clearances of 4 to 12 feet depending on model. Custom sizes available.
- Can be custom designed to your pallet depth, width and height. Single or dual pallet (double-wide) options available.
- Mounts onto most rack manufacturer's uprights, or by itself as a freestanding unit bolted to the deck
- Optional 45-3/4" D drop zone plate available for deck surface
- OSHA-required kickplate built-in
- Mesh (expanded metal) side panels provided on all gate units (can be customized to size needed)
- OSHA / Cal-OSHA compliant
- OSHA Safety Yellow Paint Finish (standard); other colors available

\*All dimensions are adjustable with custom design options

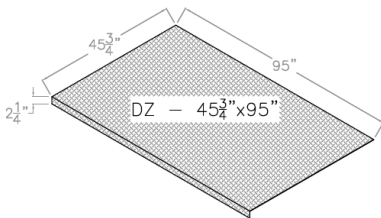

**Drop Zone Plates** are available to protect the landing from pallet loads (45-3/4" D is standard; width matches gate model)

Model # FS = Freestanding RM = Rack mounted	Clear Width Available	Gate Depth (single pallet)	Clear Height Available	Weight
FSDZ-4 RMDZ-4	4 ft.	54"	86"	533 lbs.
FSDZ-5 RMDZ-5	5 ft.	54"	86"	551 lbs.
FSDZ-6 RMDZ-6	6 ft.	54"	86"	568 lbs.
FSDZ-7 RMDZ-7	7 ft.	54"	86"	586 lbs.
FSDZ-8 RMDZ-8	8 ft.	54"	86"	604 lbs.
FSDZ-9 RMDZ-9	9 ft.	54"	86"	621 lbs.
FSDZ-10 RMDZ-10	10 ft.	54"	86"	639 lbs.
FSDZ-11 RMDZ-11	11 ft.	54"	86"	656 lbs.
FSDZ-12 RMDZ-12	12 ft.	54"	86"	674 lbs.

**w.w.Cannon, Inc.**

Design. Layout. Build. Install.

1-800-442-3061  
www.wwcannon.com



GUARDS  
MEZZANINES  
LIFTS  
ACCESS