

Vacuum Upenders


Model U - 90° Tilt Upender/Downender - Standard Duty

Caldwell's new Vacuum Upender can be used to handle numerous non-porous materials. Eliminate the additional work pieces and manpower required to properly position your product.



PRODUCT FEATURES:

- Standard 110V plug-in style power supply for easy installation.
- Vacuum reservoir maintains load in the event of power loss.
- Fully adjustable to handle varying lengths/widths of material.
- Linear actuator provides smooth, continuous tilting.
- Color-coded vacuum level indicator gauge is easy to read.
- Adjustable guide handle for ergonomic operation.
- Non-marking neoprene vacuum pads protect the load from damage.

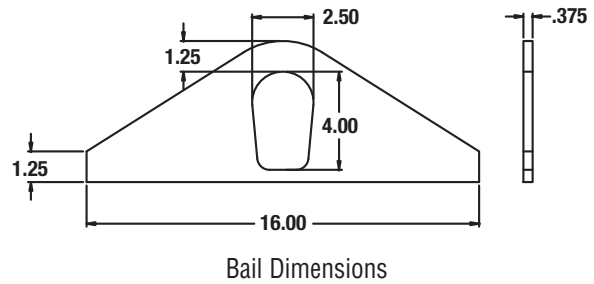

Twin Crossarm

Twin Crossarm Models have four pads and are available with main beam lengths of 4', 6', or 8' and crossarm lengths of 3', 4' or 5'.

SPECIFICATIONS

Rated Capacity (lbs.)	Number of Pads	Pad Diameter (in.)	Model Number
Non-Glass Material			
100	4	4	UE1S3-__-D__
340	4	7-1/4	UE3S6-__-D__
620	4	9-5/8	UE6S8-__-D__
800	4	10-5/8	UE8V8-__-D__
1200	4	12-1/4	UE12V10-__-D__
1600	4	14-1/4	UE16V12-__-D__
2000	4	16	UE20V14-__-D__
Glass Only			
180	4	6-7/8	UE1M5-__-D__
500	4	9-1/4	UE5M8-__-D__

Other sizes available, consult factory.

Please specify desired length where __ is in the Model Number i.e. UE6S8-8-D4 has an 8' main beam and two 4' crossarms.

Quad Crossarm

Quad Crossarm Models have eight pads and are available with main beam lengths of 6', 8', or 10' and crossarm lengths of 3', 4' or 5'.

SPECIFICATIONS

Rated Capacity (lbs.)	Number of Pads	Pad Diameter (in.)	Model Number
Non-Glass Material			
200	8	4	UE2S3-__-Q__
320	8	5	UE3S4-__-Q__
680	8	7-1/4	UE6S6-__-Q__
1240	8	9-5/8	UE12S8-__-Q__
*1600	8	10-5/8	UE16V8-__-Q__
*2000	8	12-1/4	UE24V10-__-Q__
Glass Only			
180	8	4-7/8	UE1M4-__-Q__
360	8	6-7/8	UE3M5-__-Q__
1000	8	9-1/4	UE10M8-__-Q__




Other sizes available, consult factory.

Please specify desired length where __ is in the Model Number i.e. UE12S8-10-Q3 has a 10' main beam and two 3' crossarms.

*10' main beam will be our heavy duty design.

Vacuum Upenders

Model U - 90° Tilt Upender/Downender - Standard Duty

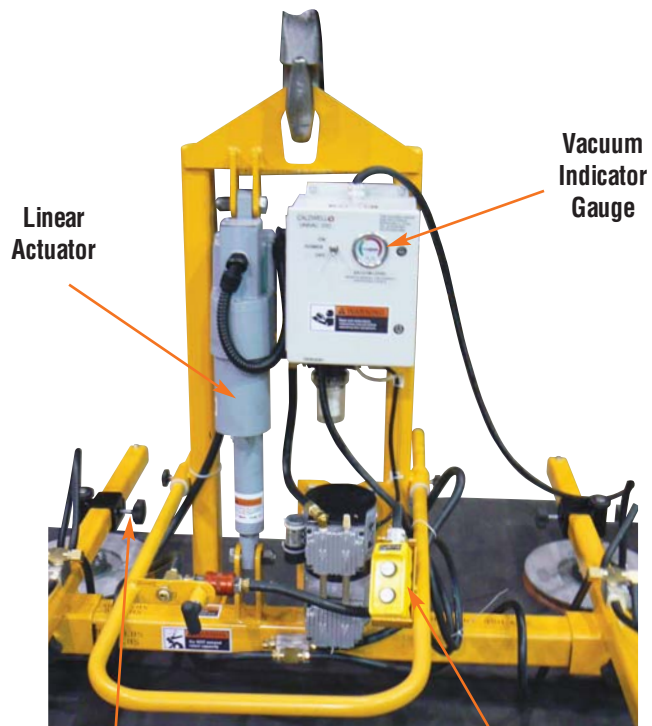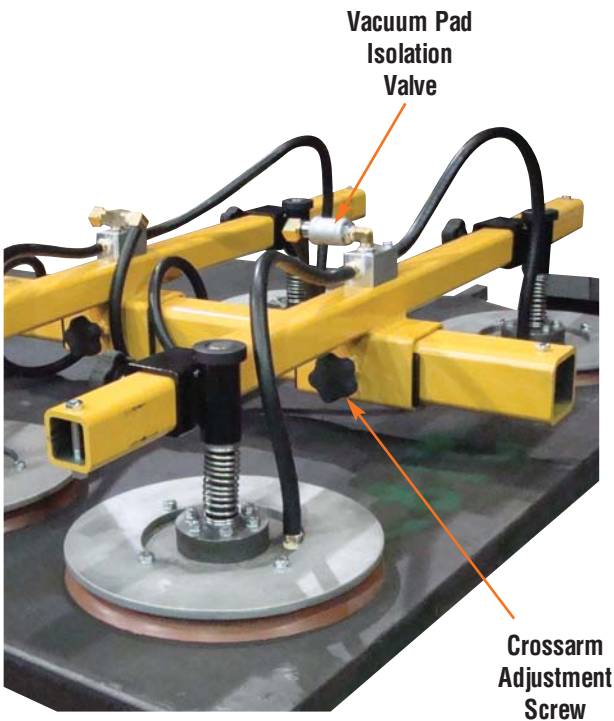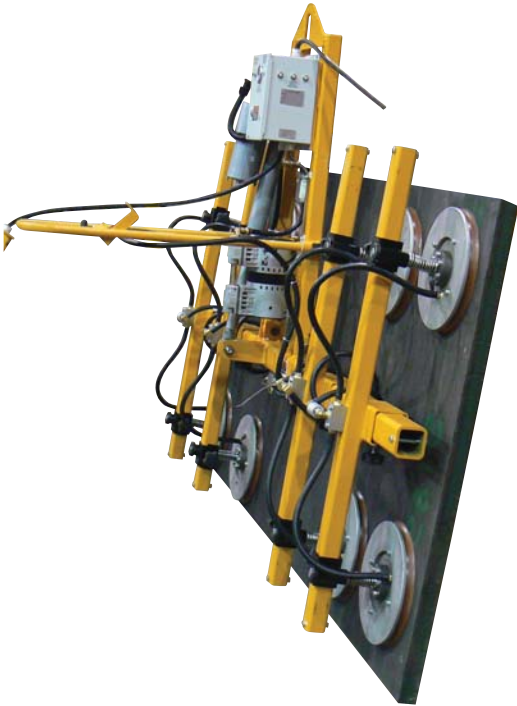

OPTION: Audible Low Vacuum Warning Device.

Pad Adjustment Screw



Tilt Control Pendant