



Model 24

Adjustable Bail Lifting Beam


Off-center loads are easier than ever with the **Model 24 Adjustable Bail Lifting Beam**. Simply slide the bail along the channel and lock it into preset positions. Simple concept. Fantastic results.



Product Features:

- Handles off-center loads by adjusting the bail before a lift
- Adjustable spread options available
- Swivel hooks with hook latches standard
- Wide range of sizes and capacities available
- Complies with ASME standards


MODEL 24

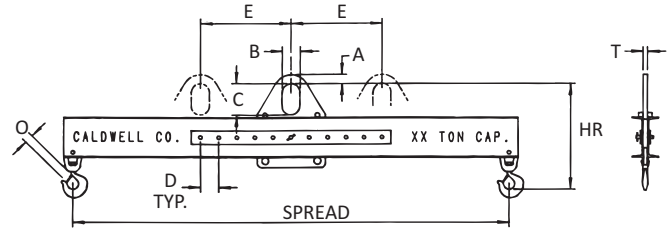

Rated Capacity (tons)	Model Number HR Headroom (in.) Weight (lbs.)	Spread (feet)										Other Dimensions (in.)	
		3	4	6	8	10	12	14	16	18	20		
1/2	Model Number	24-1/2-3	24-1/2-4	24-1/2-6	24-1/2-8	24-1/2-10	24-1/2-12	24-1/2-14	24-1/2-16	24-1/2-18	24-1/2-20	A=1-1/2	T=5/8
	HR Headroom Weight	13-1/2 47	13-1/2 56	13-1/2 75	12-5/8 82	13-1/2 95	13-1/2 147	13-1/2 168	14-1/2 255	14-1/2 278	14-1/2 304	B=3 C=5	O=1
1	Model Number	24-1-3	24-1-4	24-1-6	24-1-8	24-1-10	24-1-12	24-1-14	24-1-16	24-1-18	24-1-20	A=1-1/2	T=5/8
	HR Headroom Weight	13-1/2 47	13-5/8 56	13-5/8 83	14-5/8 126	14-5/8 170	14-5/8 198	15-5/8 268	15-5/8 298	16-1/2 409	16-1/2 449	B=3 C=5	O=1
2	Model Number	24-2-3	24-2-4	24-2-6	24-2-8	24-2-10	24-2-12	24-2-14	24-2-16	24-2-18	24-2-20	A=1-1/2	T=3/4
	HR Headroom Weight	14 48	15-1/8 89	15-1/8 117	16-1/8 170	18-1/2 240	17-1/2 278	18-1/4 369	18-1/4 416	19-1/2 547	19-1/2 605	B=3 C=5	O=1
5	Model Number	24-5-3	24-5-4	24-5-6	24-5-8	24-5-10	24-5-12	24-5-14*	24-5-16*	24-5-18*	24-5-20*	A=2	T=1
	HR Headroom Weight	21-1/2 140	21-1/2 160	21-1/2 215	22-1/2 304	23-1/2 430	27 633	27 664	28 746	29 1321	30-3/8 1525	B=4 C=7	O=1 O=1-1/2*
10	Model Number	24-10-3	24-10-4	24-10-6	24-10-8	24-10-10	24-10-12	24-10-14	24-10-16	24-10-18	24-10-20	A=2	T=1-1/4
	HR Headroom Weight	25-3/4 210	25-3/4 211	28-3/4 432	28-3/4 522	31-3/4 759	31-3/4 993	31-3/4 1128	31-3/4 1257	34-3/4 1738	34-3/4 1908	B=4 C=7	O=1-3/4
15	Model Number	24-15-3	24-15-4	24-15-6	24-15-8	24-15-10	24-15-12	24-15-14	24-15-16			A=2-1/2	T=1-1/2
	HR Headroom Weight	28-1/4 252	30-1/2 330	33-1/2 502	33-1/2 542	33-1/2 882	37 1455	37 1630	37 1800			B=5 C=9	O=2
20	Model Number	24-20-3	24-20-4	24-20-6	24-20-8	24-20-10	24-20-12					A=2-1/2	T=1-1/2
	HR Headroom Weight	31 315	34 399	37 735	34 720	37 1276	37 1251					B=5 C=9	O=2


Other Dimensions (in.)	D=3 E=6	D=3 E=9	D=3 E=12	D=4 E=16	D=4 E=20	D=4 E=24	D=6 E=30	D=6 E=36	D=6 E=42	D=6 E=48
------------------------	------------	------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

PRODUCT OPTIONS




OPTION A
Extra Holes

Allows for multiple hook positioning. Specify number and spread(s) required.
*Could increase headroom.




OPTION B
Faspins

For ease of positioning hooks with quick release. Specify number of faspins required.



OPTION C
Extra Hooks

Allows for multiple pick points. Specify number of hooks required.



OPTION D
Pin Type Bail

Lifting pin located between structural channel. (Hoist hook information must be supplied.)