


# Narrow Applications




## Model C - Load Beam with 4 Inline Pads - Heavy Duty

For lifting long, narrow sized material. Width should not exceed 5 times the pad diameter (see specifications below for pad diameter).

**QUICKSHIP PROGRAM**

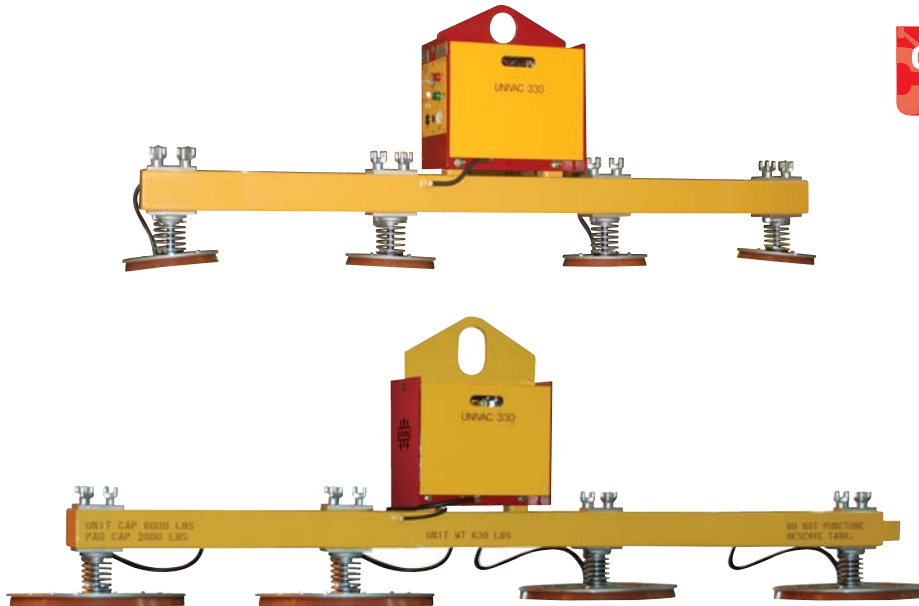

In line units to handle long narrow material.

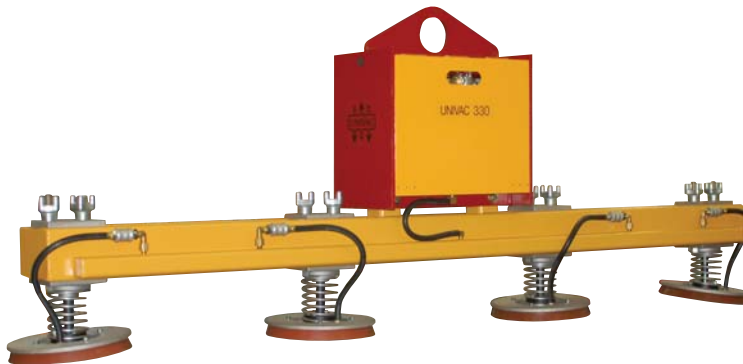

Individual pads can be isolated from the system with the standard manual slide valves.

### SPECIFICATIONS

Add FEET to blank Model Number box to complete code.  
Example: 5' load beam - CE32V12 **LENGTH**

Rated Capacity (lbs.)	Base Wt. @ 5' (lbs.)	Model Number	Power-Pac	Flared Diameter (in.)	Load Beam Length (ft.)						
					5	6	8	10	12	15	20
<b>Electric</b>											
3200	410	CE32V12 <input type="checkbox"/>	UNIVAC-330	14-1/4	5	6	8	10	12	15	20
4000	430	CE40V14 <input type="checkbox"/>	UNIVAC-330	16	5	6	8	10	12	15	20
6000	465	CE60V16 <input type="checkbox"/>	UNIVAC-330	19	—	6	8	10	12	15	20
<b>Shop Air - Venturi</b>											
3200	280	CA32V12 <input type="checkbox"/>	V-40	14-1/4	5	6	8	10	12	15	20
4000	315	CA40V14 <input type="checkbox"/>	V-40	16	5	6	8	10	12	15	20

Other sizes available, consult factory.

Univac® Section