C Lifting Beams / Bulk Container


Model 27SL

Bulk Container Lifting Beams


When your facility uses bulk containers with four nylon loops, the **Model 27SL** helps protect the load, operator, and container.

Product Features:

- Tube construction for smooth surface with no sharp edges
- · Low-headroom design
- Easily attach to load with open lifting lugs
- Lug spacing will hold up to a 3" wide loop
- Oversized lifting eye to accept a wide range of hooks
- Complies with ASME standards



NOTE: All dimensions shown in inches.



Optional strap retainers available -

ask us for more information

Other sizes available, please consult factory.

1 TONCAP



AWARNING

For all Model 27s, lifts can be unstable when connecting below the load's center of gravity. Consult Caldwell for more information.

Model 27SD

Standard Adjustable 4-Point Lifting Beam


Handle large loads using multiple pick points. Choose from 3-, 5-, or 10-ton capacities with adjustable spreads. For customizations, choose the Model 27F on page 25.

Product Features:

- · Low-headroom design
- · Swivel hooks with latches standard
- Adjustable spreads on 1' increments
- · Faspins for easy crossarm adjustment
- Complies with ASME standards

Model Number	Capacity (tons)	Dimensions (in.)								
		Main Beam Min./Max.	Crossarms Min./Max.	HR	Bail					Weight
					A	В	С	Т	0	(lbs.)
27SD-3-84/60	3	36/84	24/60	28.2	1.25	3	5	1	0.97	375
27SD-5-120/96	5	48/120	36/96	32.7	2	4	7	1.25	1.06	760
27SD-10-144/96	10	72/144	36/96	42.0	2	4	7	1.25	1.41	1530

Custom sizes and capacities available. Please fill out the Lifting Beam Application Evaluation on page 30

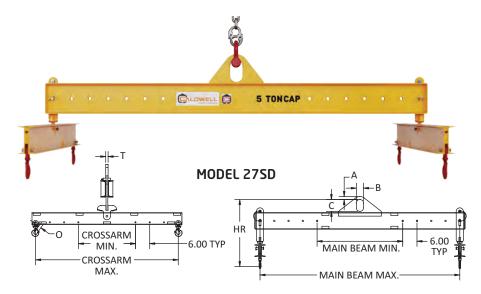

Get the Latest Caldwell News

Follow us on LinkedIn & Facebook to stay informed and in touch!

@The Caldwell Group, Inc.







Model 27F

4-Point Lifting Beams

Choose from three design options to build a custom 4-point beam for your specific application: Multiple Bails, Adjustable Bail, or Adjustable Spread. Complies with ASME standards.



This product is customizable. To get exactly what you want, please call us at 800.628.4263.



PRODUCT OPTIONS



OPTION A Multiple Bails

Use 2 or 4 hoists to increase lifting stability.



OPTION B Adjustable Bail

Used when load-leveling capability is required along length of load.



OPTION C Adjustable Spread

Use when adjustability in length and width is required.

Model 27T

3-Point Lifting Beams

With help from Caldwell engineers, design a 3-point, low-headroom lifting beam to your exact specifications. Multiple pick points allow you to tackle heavy loads. Complies with ASME standards.



ORDER TODAY!

This product is customizable. To get exactly what you want, please call us at 800.628.4263.



PRODUCT OPTIONS



OPTION A Multiple Bails

Use 2 hoists to increase lifting stability.



OPTION B Adjustable Bail

Used when load-leveling capability is required along length of load.





OPTION C Adjustable Spread

Use when adjustability in length and width is required.

