

Narrow Applications




Model B - Twin Pad Load Beam - Heavy Duty

For lifting smaller rectangular shaped material. Width should not exceed 5 times the pad diameter (see specifications below for pad diameter).



Custom designed bail for large crane hook.

QUICKSHIP PROGRAM

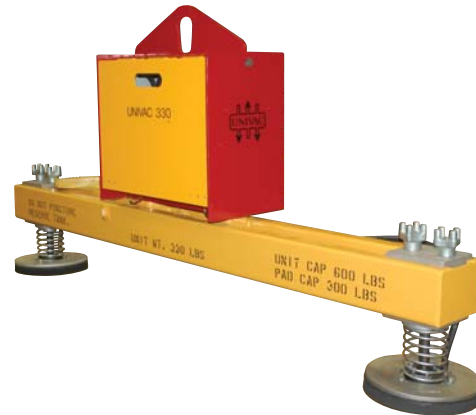

Shown with sponge pads for handling rough or semi-porous material.



Twin pad unit with sling for long heavy rigid material and silicone vacuum pads for handling hot plate.

SPECIFICATIONS

Add FEET to blank Model Number box to complete code.
Example: 4' load beam BE30V16

Rated Capacity (lbs.)	Base Wt. @ 4' (lbs.)	Model Number	Power-Pac	Flared Diameter (in.)	Load Beam Length (ft.)			
					4	5	6	8
Electric								
3000	355	BE30V16 <input type="text"/>	UNIVAC-330	19	4	5	6	8
4000	375	BE40V20 <input type="text"/>	UNIVAC-330	23	4	5	6	8
Shop Air - Venturi								
3000	225	BA30V16 <input type="text"/>	V-40	19	4	5	6	8
4000	250	BA40V20 <input type="text"/>	V-40	23	4	5	6	8

Other sizes available, consult factory.