



# Model 82LA

## Slit Coil C-Hook

Efficiency matters. And when you can move more than one slit coil at a time, crane operators save time and, therefore, money. Set them up for success with Caldwell's Model 82LA.



### Product Features:

- Designed for heavy-duty applications
- Handles multiple slit coils which maximizes handling efficiency
- Recessed counterweight minimizes interference with equipment or other obstacles
- High tensile alloy steel plate reduces physical size and weight
- Counterbalanced to hang level when empty
- Inside radius on hooks avoid coil edge contact
- Curved coil saddle is standard
- Guide handles for ease of hook positioning
- Available with optional padding for additional coil protection
- Complies with ASME standards



**⚠ WARNING**

Center of the hoist and bail must be in-line with the load's center of gravity.

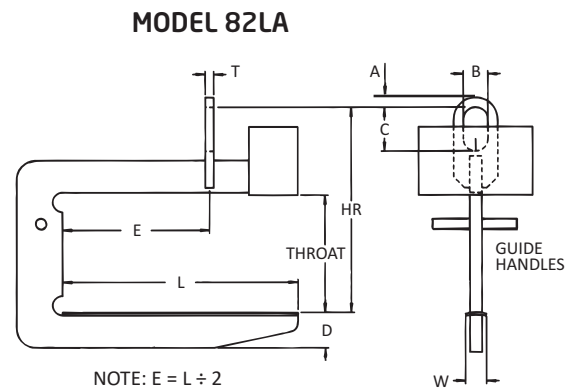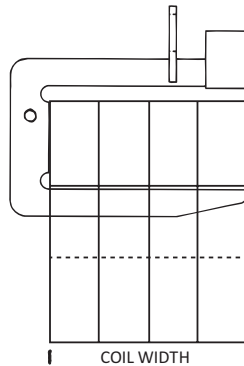

Model Number	Capacity (tons)	Dimensions (inches)										Weight (lbs.)
		Coil Width Max.	Throat	Lifting Arm				Bail Dimensions				
				Length L	Depth D	Width W	HR Headroom	Opening			Thk. T	
A	B	C										
82LA-5-36	5	36	24	36	5.5	4	37.5	1-1/2	4	7	1-1/4	450
82LA-5-48		48	24	48	6.2	4	38.2	1-1/2	4	7	1-1/4	555
82LA-5-60		60	24	60	7	4	38.9	1-1/2	4	7	1-1/4	680
82LA-7 1/2-36	7-1/2	36	24	36	5.8	4	37.75	1-1/2	4	7	1-1/2	600
82LA-7 1/2-48		48	24	48	6.6	4	38.5	1-1/2	4	7	1-1/2	765
82LA-7 1/2-60		60	24	60	7-1/8	4	39	1-1/2	4	7	1-1/2	902
82LA-10-48	10	48	24	48	7.5	4	41.4	2	5	9	1-3/4	946
82LA-10-60		60	24	60	7-5/16	4	41.6	2	5	9	1-3/4	1281
82LA-10-72		72	24	72	8.25	4	42-1/8	2	5	9	1-3/4	1510
82LA-15-48	15	48	30	48	7.4	4	47.25	2	5	9	1-3/4	1465
82LA-15-60		60	30	60	8.2	4	48	2	5	9	1-3/4	1760
82LA-15-72		72	30	72	9	4	48-3/4	2	5	9	1-3/4	2100
82LA-20-60	20	60	30	60	9.3	4	52-1/8	2.25	6	12	2	2150
82LA-20-72		72	30	72	10.7	4	53.5	2.25	6	12	2	2580
82LA-25-60	25	60	34	60	9.25	4	58	2.5	6	14	2.25	2910
82LA-25-72		72	34	72	10.7	4	58-1/2	2.5	6	14	2.25	3500
82LA-30-72	30	72	34	72	11	4	59.9	2.75	6	14	2.5	3802

Other sizes available, consult factory.