


Cogan Mezzanine Flooring Options

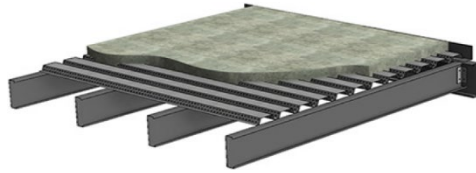

Concrete

Description:

4" concrete thickness poured over galvanized corrugated steel deck.



Corrugated Decking

Description:


Steel underlay used to reinforce resin board and concrete flooring.

Width: 3 ft.

Lengths: 4'-0", 8'-0", 9'-0", 10'-0", 11'-0", 12'-0", 13'-0", 14'-0", 15'-0", 16'-0"

Gauges: 18GA, 20GA, 22GA

Finish: Galvanized, white underside

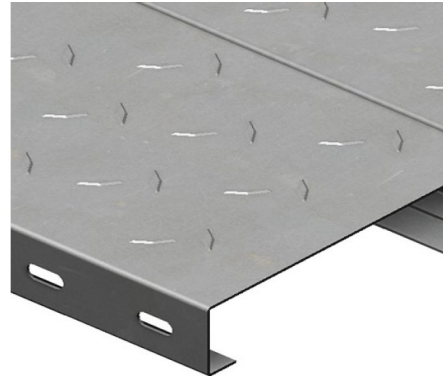

Diamond Grip Flooring

Description:


Anti-skid diamond grip dimples provide add'l traction to maximize safety.

Widths: 6", 9", 12"

Length: 12'

Gauges: 12GA, 14GA

Finish: Powder coated

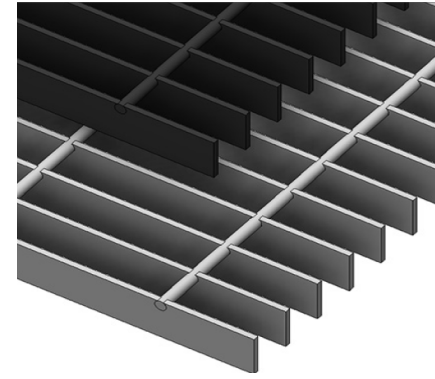

Open Bar Grating


Description:

Best choice for heavy industrial use. Open bar grating allows for light and sprinkler penetration.

Width: 3 ft.

Lengths: 4'-0", 8'-0", 12'-0", 16'-0", 20'-0", 24'-0"

Finish: Painted black or hot-dipped galvanized

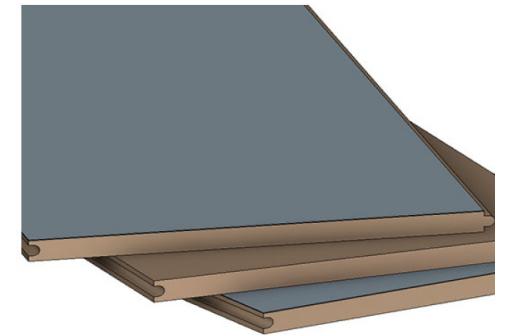

Resin Board

Description:

More comfortable to walk and work on. Less expensive than concrete or bar grating. Contributes to points for LEED qualified buildings.

Thicknesses: 1/2", 3/4", 1 1/2", 1 1/8"

Sheet Size: 4' x 8' / 32 sq. ft.

Finish: Unfinished, Grey Diamond Seal, Electrostatic Dissipative Finish

w.w.Cannon, Inc.

Design. Layout. Build. Install.

1-800-442-3061
www.wwcannon.com