


INOX-STAR

Stainless steel eye bolt.



PRODUCT FEATURES


- Large WLL range 0.5 t–2.5 t.
- Non-removable special bolt and ring body made of duplex steel 1.4462.
- Variable bolt lengths for use in threaded and through holes.
- Fast and simple installation.
- High resistance in sea water or in environments with high concentration of chlorine ions.
- The penta shape clearly distinguishes it from conventional lifting points.
- Rotatable through 360°.
- Can be loaded from all sides.

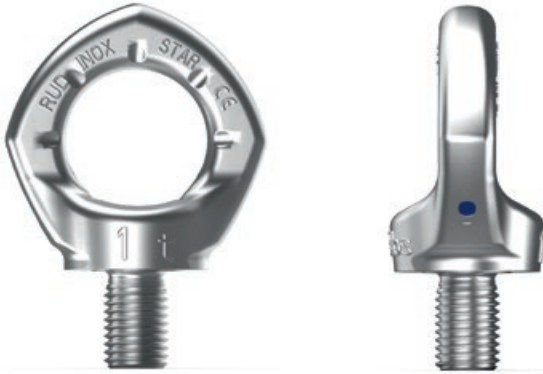

Rotatable through 360°.



Penta shape.



Clear marking of the minimum WLL.



INOX-STAR STAINLESS EYEBOLT – METRIC.

Type	WLL [t]	Weight (kg/unit)	T [mm]	B [mm]	C [mm]	D [mm]	E [mm]	G [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Tightening torque [Nm]	Ref. No.
INOX-STAR M12	0.5	0.19	43	14	12	30	30	32	20	56	18	M12	8	25	7993835
INOX-STAR M16	1	0.31	50	16	14	35	36	38	22	65	24	M16	10	60	7993836
INOX-STAR M20	2	0.53	58	19	16	40	43	47	27.5	74	30	M20	12	115	7993837
INOX-STAR M24	2.5	0.92	70	24	19	48	51	56	33	92	36	M24	14	190	7993838
INOX-STAR M12 L = 50	0.5	0.22	43	14	12	30	30	32	18	56	50	M12	8	25	7997822
INOX-STAR M16 L = 50	1	0.35	50	16	14	35	36	38	22	65	50	M16	10	60	7910089
INOX-STAR M20 L = 60	2	0.6	58	19	16	40	43	47	27.5	74	60	M20	12	115	7998714

Subject to technical changes!

