


# VRBK-FIX

VIP-Load ring edge FIX.



## PRODUCT FEATURES

- Large WLL range 4 t – 50 t.
- Split force introduction thanks to multiple point fixing.
- Suspension ring pivots 270°.
- WLL possible up to 90° in load ring plane.
- Thanks to the weld arrangement (circular fillet weld), no contact/crevice corrosion can occur.
- Patented wear markings for easy determination of wear.
- The clamping spring achieves noise reduction and keeps the suspension ring in the desired direction.

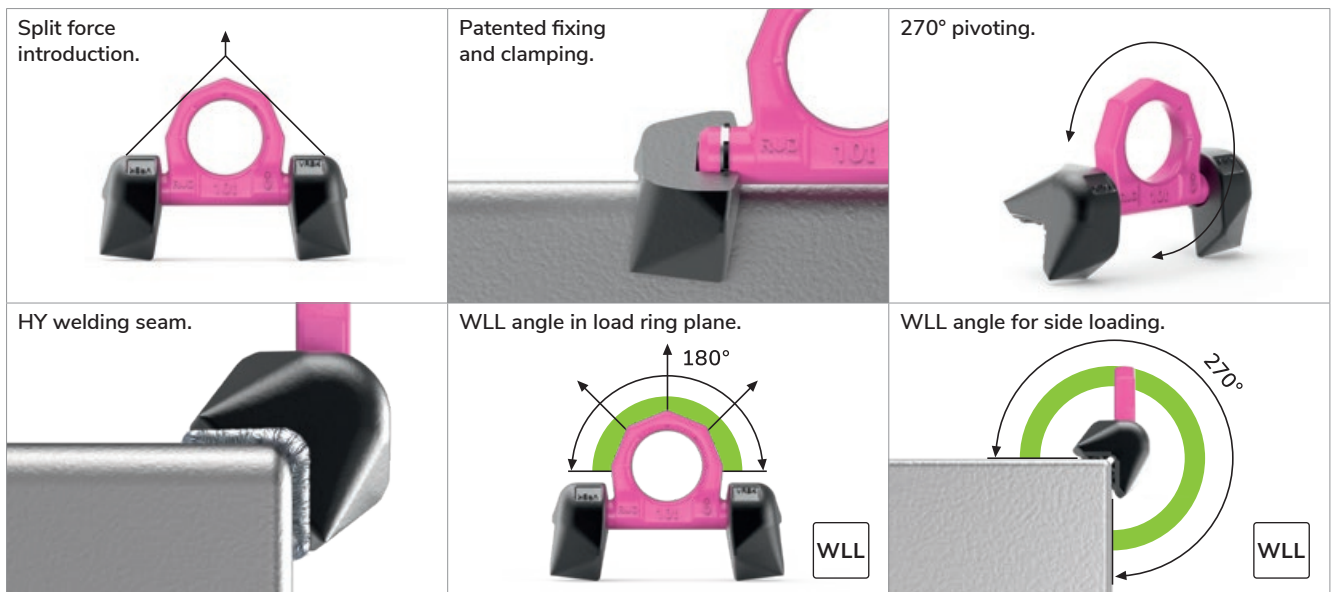

✓ Tested and certified by DGUV.

Test criteria: GS-OA-15-04: 2015-12  
Certificate no.: OA 1951041

- Can be pivoted through 270°.
- Pre-assembled unit of suspension ring and weld-on blocks.
- No rusting: all-round HY weld.

# VRBK-FIX / VRL-FIX / VASKK-FIX

## Technical data.

### VRBS-FIX – WELDABLE VIP-LOAD RING FOR 90° EDGES.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Welding seam	Ref. No.
VRBK-FIX 4t	4	1.05	65	32	14	28	48	141	30	HY 4 + a3	7902149
VRBK-FIX 6.7t	6.7	2.16	84	40	20	35	60	181	34	HY 5 + a3	7902150
VRBK-FIX 10t	10	4.4	94	52	22	46	65	212	46	HY 8 + a3	7902256
VRBK-FIX 16t	16	9.73	126	66	27	57	90	284	64	HY 10	7909845
VRBK-FIX 31.5t	31.5	24.84	177	89	42	78	130	394	70	HY 17	7906225
VRBK 50t	50	76.35	303	134	70	118	230	626	96	HY 25	7904653

Subject to technical changes!

### VRL-FIX – OCTAGONAL RING LINK.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	Ref. No.
VRL-FIX 4t	4	0.4	55	107	14	69	48	17	18	76	7906890
VRL-FIX 6.7t	6.7	0.93	71	134	19	90	60	23	24	99	7906891
VRL-FIX 10t	10	1.44	78	152	19.5	97	65	28	29	105	7906892
VRL-FIX 16t	16	3.2	104	204	27.5	131	90	35	37	146	7906893
VRL-FIX 31.5t	31.5	8.8	152	292	41	193	130	46	47	214	7906894
VRL-FIX 50t	50	27.9	265	510	70	335	230	63	63	371	7907412

Subject to technical changes!

### VASKK-FIX – WELD-ON BLOCK.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Welding seam	Ref. No.
VASKK-FIX 4t	4	0.33	18	32	-	28	18.5	-	30	HY 4 + a3	7910942
VASKK-FIX 6.7t	6.7	0.57	24	40	-	35	24.5	-	34	HY 5 + a3	7910943
VASKK-FIX 10t	10	1.42	29	52	-	46	30	-	46	HY 8 + a3	7910944
VASKK-FIX 16t	16	3.32	41	66	-	57	37	-	65	HY 10	7909844
VASKK-FIX 31.5t	31.5	7.9	51	89	-	78	48.5	-	70	HY 17	7910279
VASKK 50t	50	23.5	71	134	-	118	67	-	96	HY 25	7903914

Subject to technical changes!

