



Model TLC

Locking Type

The Model TLC is a vertical lifting clamp incorporating a “Lock Open” and a “Lock Closed” feature. The clamp is recommended for lifting and turning of a single curved plate/pipe from horizontal to vertical to horizontal. The “Lock Open”, “Lock Closed” feature facilitates attaching and removing the clamp from the curved plate/pipe.



Designed for curved plate and pipe.

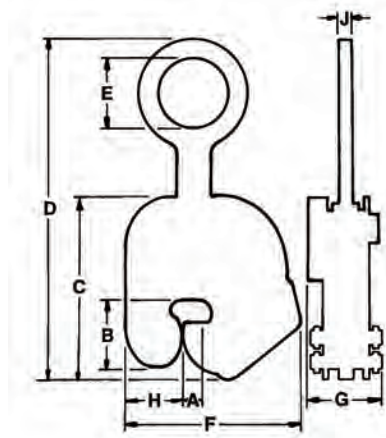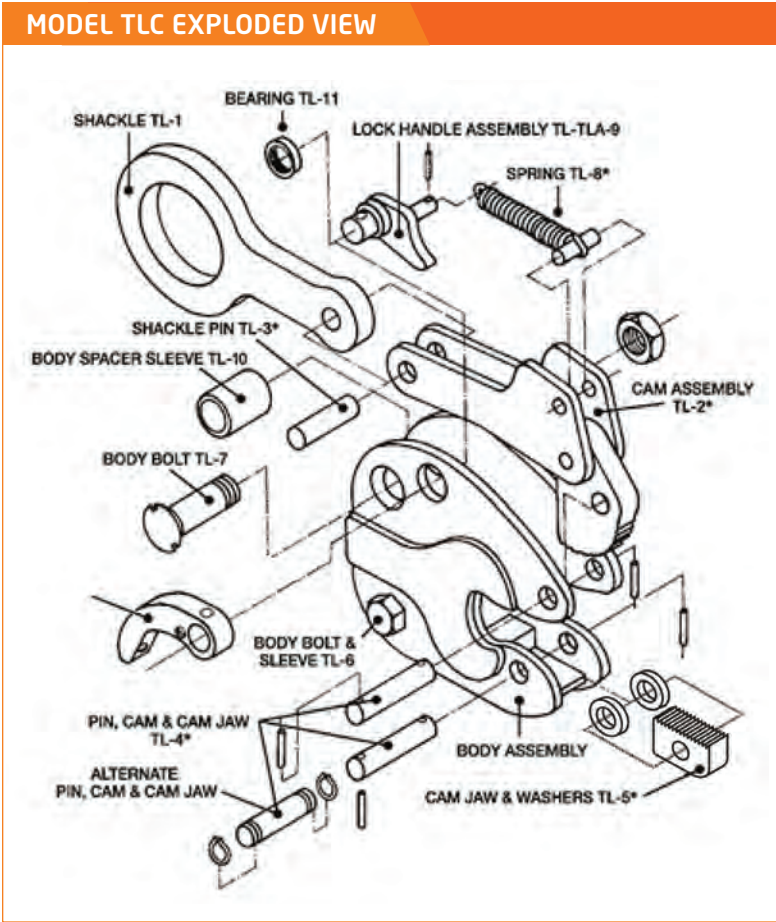

Show Us Your Renfro!

Do you have a “vintage” RENFROE clamp that’s still in good working order? Do you have a brand new clamp that’s lifting something cool? We’d love to see YOUR RENFROE clamp in action. **Snap a photo and send it to: lsympson@caldwellinc.com.** You never know ... we might make you famous on our blog or social media pages!



MODEL TLC SPECIFICATIONS (in inches)

Part Number	Plate Thickness A	B	C	Max. D	E	Max. F	G	H	J	Weight (lbs.)
1/2 Tons Capacity										
TLC-00.50-A	0 – 5/8	2-3/8	6-1/4	11-1/8	2-3/8	4-3/4	2-3/4	1-13/16	1/2	9
TLC-00.50-B	1/2 – 1	2-3/8	6-1/4	11-1/8	2-3/8	5-1/8	2-3/4	1-13/16	1/2	10
TLC-00.50-C	3/4 – 1-1/4	2-3/8	6-1/4	11-1/8	2-3/8	5-3/8	2-3/4	1-13/16	1/2	11
TLC-00.50-D	1-1/4 – 1-3/4	2-3/8	6-1/4	11-1/8	2-3/8	5-7/8	2-3/4	1-13/16	1/2	13
1 Tons Capacity										
TLC-01.00-A	0 – 3/4	3	7-1/2	13-1/8	2-7/16	6	2-13/16	2	5/8	14
TLC-01.00-B	1/2 – 1	3	7-1/2	13-1/8	2-7/16	6-1/4	2-13/16	2	5/8	15
TLC-01.00-C	3/4 – 1-1/4	3	7-1/2	13-1/8	2-7/16	6-1/2	2-13/16	2	5/8	16
TLC-01.00-D	1 – 1-1/2	3	7-1/2	13-1/8	2-7/16	6-3/4	2-13/16	2	5/8	17
TLC-01.00-E	1-1/2 – 2	3	7-1/2	13-1/8	2-7/16	7-1/4	2-13/16	2	5/8	18
2 Tons Capacity										
TLC-02.00-A	0 – 1	3-1/2	9-3/8	16-1/4	3-5/8	8-7/8	3-3/4	2-7/8	3/4	32
TLC-02.00-B	3/4 – 1-1/2	3-1/2	9-3/8	16-1/4	3-5/8	9-3/8	3-3/4	2-7/8	3/4	33
TLC-02.00-C	1-1/4 – 2	3-1/2	9-3/8	16-1/4	3-5/8	9-7/8	3-3/4	2-7/8	3/4	35
TLC-02.00-D	2 – 2-3/4	3-1/2	9-3/8	16-1/4	3-5/8	10-5/8	3-3/4	2-7/8	3/4	37
4 Tons Capacity										
TLC-04.00-A	3/16 – 1-1/2	4	9-7/8	17-5/8	3-5/8	9	3-13/16	3	3/4	36
TLC-04.00-B	1 – 2	4	9-7/8	17-5/8	3-5/8	9-3/4	3-13/16	3	3/4	37
TLC-04.00-C	2 – 3	4	9-7/8	17-5/8	3-5/8	10-3/4	3-13/16	3	3/4	40
TLC-04.00-D	3 – 4	4	9-7/8	17-5/8	3-5/8	11-3/4	3-13/16	3	3/4	43
6 Tons Capacity										
TLC-06.00-A	1/4 – 1-3/8	4-5/8	11-1/8	20-1/8	3-1/2	10-1/4	3-7/8	3-3/8	3/4	49
TLC-06.00-B	1 – 2-1/8	4-5/8	11-1/8	20-1/8	3-1/2	11	3-7/8	3-3/8	3/4	51
TLC-06.00-C	2 – 3-1/8	4-5/8	11-1/8	20-1/8	3-1/2	12	3-7/8	3-3/8	3/4	54
TLC-06.00-D	3 – 4-1/8	4-5/8	11-1/8	20-1/8	3-1/2	13	3-7/8	3-3/8	3/4	57
8 Tons Capacity										
TLC-08.00-A	3/8 – 1-1/2	4-13/16	12-5/16	21-5/16	3-3/4	11-1/2	4-3/4	3-7/8	1	72
TLC-08.00-B	1 – 2-1/8	4-13/16	12-5/16	21-5/16	3-3/4	12-1/8	4-3/4	3-7/8	1	74
TLC-08.00-C	2 – 3-1/8	4-13/16	12-5/16	21-5/16	3-3/4	13-1/8	4-3/4	3-7/8	1	77
TLC-08.00-D	3 – 4-1/8	4-13/16	12-5/16	21-5/16	3-3/4	14-1/8	4-3/4	3-7/8	1	80
12 Tons Capacity										
TLC-12.00-A	1/2 – 2-1/2	6-1/4	15-1/8	26-3/16	3-7/8	14-1/2	6-3/4	4-3/8	1-3/4	142
TLC-12.00-B	2 – 4	6-1/4	15-1/8	26-3/16	3-7/8	16	6-3/4	4-3/8	1-3/4	150
TLC-12.00-C	3 – 5	6-1/4	15-1/8	26-3/16	3-7/8	17	6-3/4	4-3/8	1-3/4	154
TLC-12.00-D	5-1/2 – 7-1/2	6-1/4	15-1/8	26-3/16	3-7/8	18	6-3/4	4-3/8	1-3/4	158
20 Tons Capacity										
TLC-20.00-A	1/2 – 3	8-1/8	21-3/4	36-11/16	5	20-11/16	8-1/16	6-3/16	2-3/4	415
TLC-20.00-B	3 – 5	8-1/8	21-3/4	36-11/16	5	22-3/16	8-1/16	6-3/16	2-3/4	426
TLC-20.00-C	5 – 7	8-1/8	21-3/4	36-11/16	5	22-11/16	8-1/16	6-3/16	2-3/4	430
TLC-20.00-D	7 – 9	8-1/8	21-3/4	36-11/16	5	24-11/16	8-1/16	6-3/16	2-3/4	445

Consult factory for possible larger capacities. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.