





Clean, unobtrusive design

Strong, durable construction for a high level of security

CERTIFICATIONS:

(I) Life-Safety Listing ANSI/BHMA A156.3 Grade 1 California State Fire Marshall New York City MEA* *Consult factory for specific number



Features & Dimensions

Narrow Stile Mortise Exit Device

ANSI/BHMA

Grade 1

Handing

Specify handing and bevel if applicable. Lever Entry Trim is field reversible.

Pushbar Length

Standard Sizes: Dimensioned for 30", 36", 42" & 48" openings. Standard width bars can be field cut to the next smallest opening width. Backsets available in 31/32", 1-1/8", 1-1/2".

Door Thickness

Suits 1-3/4" standard. Can be modified for thicker doors.

Stile Width

Minimum 2" Stile. Fits Narrow, Medium and Wide Stile aluminum doors.

Projection

2-5/8" when fully projected, 1-5/8" when dogged.

Materials

Pushbar made of extruded aluminum, clad or anodized in a variety of finishes.

Dogging

Standard dogging with hex key or cylinder dogging option. Electric dogging also available.

Fasteners

Standard self-tapping screws.

Made of stainless steel. Supplied with exit device. See Strike options below.

Cylinders (order separately) Cylinder x Fixed Pull: (Function 03) Accepts any standard Mortise cylinder. Entry Lever (Functions 08, 09)

cylinder lengths from 1" to 1-1/4".

Accepts any standard diameter Mortise cylinder with MS® cam. Accommodates

Warranty

Five year limited.

AVAILABLE FINISHES

313 Dark Bronze Anodized

335 **Black Anodized**

628 Clear Anodized

US3 **Bright Brass**

US4 Satin Brass

US9 **Bright Bronze**


US10 Satin Bronze

10B Dark Bronze (Trim only)

US32 Bright Stainless


US32D Satin Stainless

Consult factory for special finishes.




8400

The 8400 was designed to fit standard cutout used for the Adams Rite MS® Deadbolt on aluminum stile glass doors. Backsets available: 31/32", 1-1/8" & 1-1/2".




O



Strikes

A variety of strikes are available for different applications and conditions.



Strike (Included)



Extended Lip 8460-17 (Optional)



Longface 8455-01 (Optional)




Midpanel

The Mortise exit device is also available for use with a Midpanel design. Consult factory for applications.

Trim & Function

Narrow Stile Mortise Exit Device

ANSI/BHMA Functions:

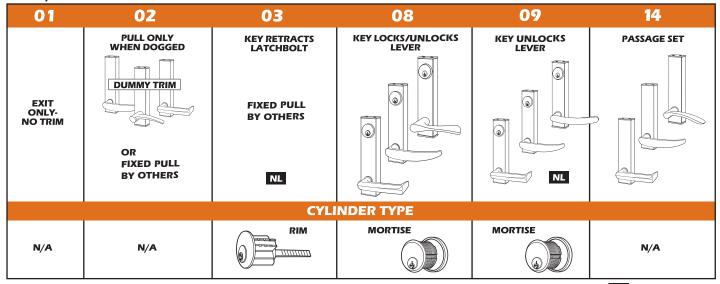


Please see page ED-10 or ED-11 for Pulls and Entry Trim, plus Entry Trim Ordering Matrix.

NL - Night Latch

Thick and Cladded Door Kits

91-0995-02* – 2" Thick Door Kit **91-0995-03*** – 2-1/4" Thick Door Kit **91-0995-04*** – 2-1/2" Thick Door Kit **91-0995-05*** – 2-3/4" Thick Door Kit **91-0995-06*** – 3" Thick Door Kit **91-0325-01** – Thermal Door Kit - 1/4" Cladding 91-0325-02 – Thermal Door Kit - 1/2" Cladding * Order 8460-xx Long Lip Strike as required

Ordering Matrix

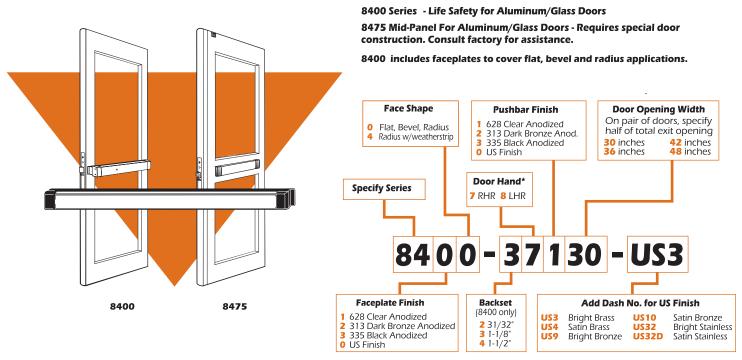



Options & Accessories

Narrow Stile Mortise Exit Device

Order by adding suffix to Exit Device in place of hyphen or by separate model number.

MOTORIZED LATCH RETRACTION

The SE motorized latch retraction option provides nearsilent operation for quiet environments such as hospitals, offices, hotels and libraries where solenoid-driven devices would be disruptive. The high speed/low current draw motor (0.4 A run current 0.2 A hold current) offers a powerful yet efficient system that allows for lighter gauge wiring and an energy-saving reduced amperage power supply. The device also features combined electric dogging and electric latch retraction which minimizes hardware projection and noise. The SE Option is available with 3000/8000 Series Exit Devices and The RITE Door®.

Specifiy by adding "SE" after exit device model number (ex. 8611SE36).

Order PS-SE Power Supply separately. (PS-SE powers 2 devices) Rated for continous duty. See 4612 Power Supply.

RX - MONITOR/SIGNAL SWITCH

M1- Single Switch M2- Dual Switch

Mounted in the exit device pushbar on the hinge end, the switch can be used to activate signal light, horn, monitor or other devices. Switch can be wired for normally open or normally closed. Can be retrofit in field to existing exit device. Dual switch version offers redundancy as required by some building codes or it can operate a second signaling device. For all Exit Devices



Specify by adding "M1" or "M2" after exit device model number. RX Monitor Kits for upgrading any 3000 or 8000 Series device: 91-0897-01 – Single Switch 91-0897-02 – Dual Switch

CYLINDER DOGGING

For all non-fire rated Adams Rite Exit Devices



For management control of dogging. Any standard 15/16" to 1-1/8" long Mortise cylinder with MS® cam can be used in a pushbar prepared at factory with Cylinder Dogging kit. Not for use with Alarm, EL or SE options.

ALARMED EXIT DEVICE



This option emits a loud (95 decibel) alarm to notify management of unauthorized exit. Alarm is controlled by a key in any standard Mortise cylinder with MS® cam to arm, disarm, delay or reset the alarm. Will not alter the Life-Safety characteristics of the exit device in any way. Red letters printed on the bar give a "hands off" warning to deter accidental actuation.

Battery Operated

Four AA alkaline batteries power twin horns for two minutes (or until disarmed) when pushbar is depressed. Beeps to signal need for new batteries.

Minimum opening width: 36"

ELECTRIC DOGGING

For all Adams Rite Exit Devices



The "ED" option's holding magnet keeps the pushbar depressed (set manually) and the latch retracted for a lower profile exit device, resulting in less damage and quieter operation. An internal microswitch signals when the bar is depressed – ideal for automatic door operators. On fire-rated devices, it's wired through the fire alarm system. Devices operate at 24VDC at .6 amps, with only a transformer and rectifier. (Not to be used as access control element. Specify "EL" with access control devices.)

Specifiy by adding "ED" after exit device model number (ex. 8611ED36).

MONITORED DUMMY PUSHBAR

8099M1 - Single Switch 8099M2 - Dual Switch

8099-00 - Dummy Only



Dummy pushbar with no latch mechanism but with either a single or dual monitor/signal switch. Can be used with a maglock, where bar turns off magnet and allows exit from building. Dual switch version allows redundancy where required by code or the operation of a signal device. Specify door type and width when ordering.

