

18"

HIGH VELOCITY FAN



STANDARD
YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



RM Rack Mount **TC** Truck Cooler **CW** Column-Wall **PS** Portable Stroller **PB** Pedestal Base

SHIPPING WEIGHT:	51 lbs	60 lbs	57 lbs	80 lbs	56 lbs
------------------	--------	--------	--------	--------	--------

SIZE	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	SHIPPING WEIGHT
			W	D	ID		
18"	3800	1/2	24"	16"	19.125"	80'	44 lbs

FEATURES

Propeller: 17" Diameter, 3 Blade GalvAlum, 33°
Fan Inlet/Outlet: High Impact Polypropylene
Finger Guards: OSHA Compliant, Spiral Wound Steel
Power Cord (115V Only): 12' Length (Switch Optional)
RPM: 1725
Decibels: 65.1 @ 20' - 76.3 @ 3'
Coverage: 2700 ft²


Warranty: 2 Years

MOTOR

VOLTAGE	MOTOR AMPS	RUNNING AMPS
115V/208-230V*	6.0/3.0-2.9	5.9/2.9-2.8
208-230/460V	2.11-1.91/.96	2.0-1.8/.9
277V	1.85	1.75

Enclosure: TEAO Standard
Frame: 56
Ambient Temperature: 104°F
Duty Cycle: Continuous

*standard

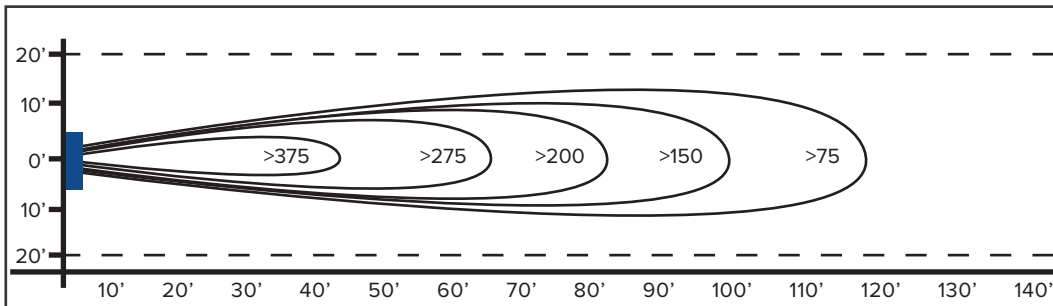

AIR FLOW PATTERN

Above velocities shown in feet/minute.