

# RAPIDGUARD® II

www.Cannon, LLC

Design. Layout. Build. Install.  
1-800-442-3061  
www.wwcannon.com

Patent Pending T-Slot  
Mounting Solution

Threaded inserts are  
pre-drilled into the  
posts.

2" SQ 14GA posts with  
6" SQ x 1/4" baseplates

## SYSTEM COMPLIANCE

ANSI | ISO | OSHA | RIA Standards

## RapidGuard® II

- Unique Lift-Off design allows for the removal of guards (panels) while the fixing system (hardware) remains attached to the guards (post), in compliance with RIA TR R15.406.
- 50% faster install than most competing products.
- Can be installed by 1 person due to the Patent Pending T-Slot mounting solution.

## Safe Distance from a Hazard

Mesh Opening	Safe Distance
1 1/4" Center to Center	4.7" (120mm)
2" Center to Center	33.46" (850mm)

## System Heights

6' - 6 3/4" (2000.25mm)  
8' - 5 1/4" (2571.75mm)

## Panel Widths

1' to 5' in 1' increments

## Sweep Space


5 1/4" (133.35mm) complies with all existing OSHA/ANSI/RIA/ISO standards.



WWCANNON.COM | (800) 442-3061 | SALES@WWCANNON.COM |

# RapidGuard® II

- Panels install vertically between 6' - 6 ¾"H & 8' - 5 ¼"H Posts (5 ¼" sweep).
- Fully framed panel adds strength and stability.
- Unique Lift-Off design allows for the removal of guards (panels) while the fixing system (hardware) remains attached to the guards (post), in compliance with RIA TR R15.406.
- 5/16"-18 x 3/4" tool removable hardware is compliant with ANSI B11.19 and RIA TR R15.406.
- All hardware including anchors included.
- Stock powder coated black panels & yellow posts.
- Panels contain 1 1/4" SQ (center to center) 10GA Welded Wire
- An integrated lock out plate and pull handle are standard on hinge doors.
- Safety Interlocks available with mounting plates.
- 13 GA 1 ¼" x 1 ¼" roll formed angle.
- 2" SQ 14GA posts with 6" SQ x ¼" baseplates
- Standard size panel heights are 6' - 1 1/2"H & 8'H by 1' to 5'W

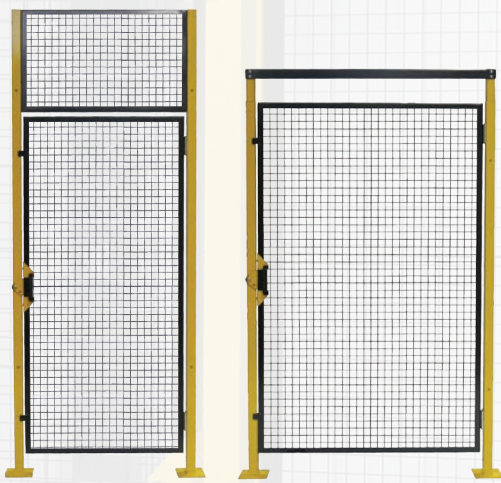

## Single Hinged Doors

Door widths (opening) 3' and 4'

### Opening Dimensions

#### 6' - 6 ¾" System Height

*(header tube above)*

3' W x 6' - 11 ¼" H


4' W x 6' - 11 ¼" H

#### 8' - 5 ¼" System Height

*(transom above)*

3' W x 6' - 7 ¼" H

4' W x 6' - 7 ¼" H

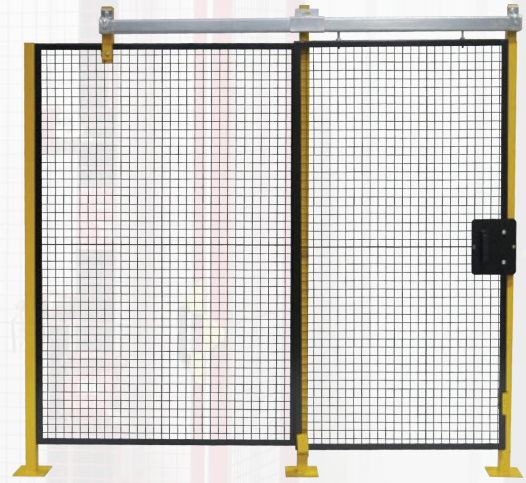

## Slide Doors

Door widths 3', 4', 5' and 6'

### Opening Dimensions

#### 6' - 6 ¾" System Height

3' W x 6' - 8 ¼" H

4' W x 6' - 8 ¼" H

5' W x 6' - 8 ¼" H

6' W x 6' - 8 ¼" H

#### 8' - 5 ¼" System Height

3' W x 8' - 1 ¼" H

4' W x 8' - 1 ¼" H

5' W x 8' - 1 ¼" H

6' W x 8' - 1 ¼" H