

# TRAFFIC DOORS

COMMERCIAL / INDUSTRIAL / LOW-TEMP  
KITCHEN / RESTAURANT / RETAIL / SUPERMARKET

	DOOR MODEL	KITCHEN & RESTAURANT	RETAIL & SUPERMARKET	INDUSTRIAL & COMMERCIAL	PRIMARY COOLER	SECONDARY COOLER	SECONDARY FREEZER	WASHDOWN
LIGHT DUTY	DSP-3	●	●					
	EHH-3	●						
	SCP-15	●						
	ENG-1	●						
	★ LWP Series / LWP Gate	●	●					
MEDIUM DUTY	★ Durulite® Retailer	●	●	●		●		
	★ P-11 Plus / P-11 Plus Gate	●	●					
	PE-500 / PG-500	●	●					
	Proline 300 / 400		●	●		●		
	SCP Series / Gate	●	●					
	★ SRP-5000 Gate	●	●					
	Durulite® Retailer R25D		●	●	●*	●	●	●
	Durulite® Retailer XHD	●	●	●		●		●
HEAVY DUTY	Durulite® Standard	●	●	●	●	●	●	●
	★ EconoClear®	●	●	●		●	●	
	FCG Series	●	●	●		●	●	
	HCP-10 / HCG-10		●	●		●		
	★ AirGard® 100		●	●		●	●	
	AirGard® 200		●	●		●	●	
EXTRA HEAVY DUTY	AirGard® 300		●	●		●	●	
	AirGard® 973		●	●		●	●	
	★ AirGard® Uniflex 240		●	●		●	●	
	Durulite® Industrial		●	●		●	●	●
	★ Durulite® Industrial CC1875		●	●		●	●	●
	Durulite® Series 200			●				

\* The Chase Doors Durulite® Retailer R25D model is DOE Compliant (Select sizes available)

★ = Best Seller!

## TRAFFIC DOORS

Traffic Doors come in many different styles and designs. The best door to use is dependent on your application. Are people or fork trucks going through the door? What role does aesthetics play in your application? Senneca Holdings has one of the largest selection of traffic doors in the industry which allows us to provide the exact traffic door for your needs. Not sure which to choose? We have highlighted some of our most popular styles to help narrow down your selection. Still have questions? Please contact your local sales representative or call us at 800.543.4455.



**DSP-3**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** 16 gauge stainless steel with delta formed vertical edges.  
**WINDOW:** 9" x 14" clear acrylic set in black rubber molding  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** 11" x 16" diamond shape translucent acrylic windows.



**EHH-3**

**TRAFFIC:** Pedestrian, Push Cart  
**APPLICATIONS:** Kitchen & Restaurant.  
**DOOR BODY:** .75" sustainable, moisture resistant, composite wood core, 1" total door thickness, full length stainless steel panel (both sides)  
**WINDOW:** 9" x 14" flush window, clear acrylic, double glazed  
**HINGE:** Eliason Hidden Hinge™  
**AVAILABLE OPTIONS:** Full length whiteboard panel (one side) with full length stainless on customer-facing side.



**ENG-1**

**TRAFFIC:** Pedestrian & Push Cart  
**APPLICATIONS:** Kitchen & Restaurant  
**DOOR BODY:** Rigid PVC frame with honeycomb polymer core, 1-1/2" total door thickness. .032" decorative high-pressure laminate (both sides), with black plastic edge molding and 8" high black plastic scuff plate (both sides)  
**WINDOW:** 9" x 14" flush window, clear acrylic, double glazed  
**HINGE:** Eliason Hidden Hinge™  
**AVAILABLE OPTIONS:** Various window sizes (including ADA Compliant) and scuff plates in various heights.



**LWP SERIES**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** .063" thick tempered aluminum alloy with delta formed vertical edges, anodized aluminum finish.  
**WINDOW:** 9" x 14" clear acrylic set in black rubber molding  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** Window options, 12" high stainless steel base plate (both sides), .032" decorative high-pressure laminate (both sides).



**SCP-15**

**TRAFFIC:** Pedestrian & Push Cart  
**APPLICATIONS:** Kitchen & Restaurant  
**DOOR BODY:** .75" sustainable, moisture resistant, composite wood core, 1" total door thickness. .032" decorative high-pressure laminate (both sides) with black plastic edge molding and 8" high black plastic scuff plate (both sides)  
**WINDOW:** 9" x 14" flush window, clear acrylic, double glazed  
**HINGE:** Eliason Hidden Hinge™  
**AVAILABLE OPTIONS:** Custom size windows, impact plates and other options available.



**LWP GATE / CAFE**

**TRAFFIC:** Pedestrian  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** .063" thick tempered aluminum alloy, shown above with optional high-pressure laminate.  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** Contour top, .032" decorative high-pressure laminate (both sides). Wide selected of laminates available. Laminate can be printed in almost any color pattern.



 Chase Doors

**DURULITE® RETAILER**

**TRAFFIC:** Pedestrian & Push Cart  
**APPLICATIONS:** Kitchen & Restaurant, Industrial & Commercial, Secondary Cooler  
**DOOR BODY:** Panel thickness is 1-1/2", skin thickness is 1/8". Rotationally molded polyethylene outer skin retains properties to -40°F  
**WINDOW:** Large Polycarbonate, black PVC frame.  
**HINGE:** V-Cam Hinge System  
**AVAILABLE OPTIONS:** Window options, Impact / Kick Plates, Teardrop Bumpers, Cart Guards, SlideTrac Bumpers™  
**OTHER:** NSF Certified  
**\*only to be used as a secondary door in cold storage applications.**



 Chase Doors

**PROLINE 300 / 400**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift  
**APPLICATIONS:** Retail & Supermarket, Industrial & Commercial, Secondary Cooler  
**DOOR BODY:** Wood Core, 1-1/2" thick (insulated, with foam), 3/4" thick (non-insulated), steel spine reinforcement, full perimeter replaceable bulb gaskets  
**WINDOW:** Single panel 1/8" thick polycarbonate (for wood core), double pane (insulated)  
**HINGE:** V-Cam Hinge System  
**AVAILABLE OPTIONS:** Window options, Lower Hinge Guards, Impact / Kick Plates, Teardrop Bumpers, Cart Guards, Insulated / Non Insulated, Partially Gasketed Doors  
**\*only to be used as a secondary door in cold storage applications.**



 ELIASON®

**P-11 PLUS**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial  
**DOOR BODY:** High strength polymer cell core with 1/2" PVC frame, 5/8" total door thickness, high impact thermoplastic exterior, galvanized steel powder coated satin black.  
**WINDOW:** 14" x 16" clear acrylic set in black rubber molding.  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** 9" x 30" ADA-Compliant Windows



 ELIASON®

**SCP / SCG SERIES**

**TRAFFIC:** Pedestrian & Push Cart  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** .75" sustainable, moisture resistant, composite wood core, 1" total door thickness.  
**WINDOW:** 9" x 14" gasketed window, clear acrylic  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** Window options, Impact / Kick Plates, .032" decorative high-pressure laminate (both sides), Full perimeter gasketing (specify SCG series)  
**OTHER:** Model SCP-8N only is NSF Certified



 ELIASON®

**PE-500 / PG-500**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** High density polyethylene textured both sides with a stainless steel back channel, 1/2" total door thickness.  
**WINDOW:** 9" x 14" acrylic set in black rubber molding  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** Window options, Jamb Guards, Impact Plates, Teardrop Bumpers, Perimeter Seal



 Chase Doors

**SRP-5000 GATE / CAFE**

**TRAFFIC:** Pedestrian & Push Cart  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** .5" thick USDA accepted stress relieved high-density textured polyethylene. Door comes completely assembled with 3.5" diameter steel posts. Panel is raised 10" from floor and is 38" in height. Complete door system stands 48" high.  
**HINGE:** Ultra-Soft Touch™ assisted gravity hinge system is "hidden" in the back spine.  
**AVAILABLE OPTIONS:** Posts available with core drill installation for a permanent barrier or foot plate for temporary barrier.



**P-11 PLUS GATE / CAFE**

**TRAFFIC:** Pedestrian & Push Cart  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** .5" thick polymer cell core with .5" solid PVC frame, 5/8" total door thickness. High-Impact Thermoplastic exterior (both sides), available in multiple colors. Shown above with optional mounting post.  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** Mounting Post



**SCP GATE / CAFE**

**TRAFFIC:** Pedestrian & Push Cart  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** .75" sustainable, moisture resistant, composite wood core, 1" total door thickness. .032" decorative high-pressure laminate (both sides)  
**EDGE TRIM:** Black plastic molding  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** Contour top and bottom





Chase Doors

**DURULITE® RETAILER R25D**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial, Primary/Secondary Cooler & Freezer  
**DOOR BODY:** 1/8" thick high-density rotationally molded polyethylene and Non-CFC urethane foam core. Replaceable perimeter edge gasketing, full height backspine  
**HINGE:** V-Cam Hinge System  
**AVAILABLE OPTIONS:** Window Options, Impact / Kick Plates, Teardrop Bumpers, Cart Guards, Locking Devices, 90° x 90° Hardware, SlideTrac Bumpers™  
**OTHER:** NSF Certified, DOE Compliant (select sizes available)



Chase Doors

**DURULITE® RETAILER XHD**

**TRAFFIC:** Pedestrian & Push Cart  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket, Secondary Cooler, Washdown  
**DOOR BODY:** 1-1/2" overall panel thickness, Non-CFC urethane foam core, rotationally molded polyethylene outer skin thickness is 1/8" and retains properties to -40°F. Replaceable perimeter edge gasketing and a full height backspine  
**HINGE:** V-Cam Hinge System  
**AVAILABLE OPTIONS:** Partial Door Gasketing, Window Options, Impact / Kick Plates, Teardrop Bumpers, Locking Devices, Cart Guards, SlideTrac Bumpers™  
**\*only to be used as a secondary door in cold storage applications.**



Chase Doors

**DURULITE® STANDARD**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial, Secondary Cooler & Freezer, Washdown  
**DOOR BODY:** 1-7/8" overall panel thickness, 1/8" rotationally molded polyethylene outer skin thickness and retains properties to -40°F. Non-CFC urethane foam core, upper & lower hinge adapters, leading and back edge Internal reinforcement, gasketing.  
**HINGE:** V-Cam Hinge System  
**AVAILABLE OPTIONS:** Lower Hinge Guards, Window Options, Impact / Kick Plates, Teardrop Bumpers, 180° x 90° Hardware, Spring Assist, Locking Devices  
**OTHER:** NSF Certified  
**\*only to be used as a secondary door in cold storage applications.**



**ECONOCLEAR®**

**TRAFFIC:** Pedestrian, Push Cart  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial, Secondary Cooler & Freezer,  
**DOOR BODY:** .120" clear PVC vinyl  
**HINGE:** Top Mounted Gravity Hinge  
**AVAILABLE OPTIONS:** Low Temperature or Anti-Static PVC material, impact plates  
**\*only to be used as a secondary door in cold storage applications.**



**FCG SERIES**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack  
**APPLICATIONS:** Kitchen & Restaurant, Retail & Supermarket  
**DOOR BODY:** .75" sustainable, moisture resistant, composite wood core, 1.5" total door thickness, Full length stainless steel panels (both sides), Perimeter seal  
**WINDOW:** 9" x 14" clear acrylic set in black rubber molding  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** Teardrop Bumpers, Jamb Guards / Push Plates, Window Options  
**OTHER:** Model FCG-3N only is NSF Certified



**HCP-10 / HCG-10**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack  
**APPLICATIONS:** Retail & Supermarket, Industrial & Commercial  
**DOOR BODY:** Urethane foam core with a high strength structural PVC frame, 1-1/2" total door thickness, High-impact thermoplastic exterior, 18" high teardrop Bumpers (both sides).  
**WINDOW:** 14" x 16" clear acrylic, double glazed set in black rubber molding  
**HINGE:** Eliason Easy Swing® Hinge  
**AVAILABLE OPTIONS:** 24" high scuff plate (both sides), perimeter seal  
**OTHER:** Models HCP-10N and HCG-10N only are NSF Certified





 Chase Doors

**AIRGARD® 100**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift

**APPLICATIONS:** Industrial & Commercial, Secondary Cooler & Freezer

**DOOR BODY:** 45 oz. abrasion-resistant, vinyl coated nylon material, flexible stays (one row per panel), top / bottom / jamb side wipers, 3" center overlap.

**WINDOW:** 30" x 14" window.

**HINGE:** Top Mounted Gravity Hinge

**AVAILABLE OPTIONS:** Window Options, Impact Plates / Pocket Weights, Hinge & Color Options

**\*only to be used as a secondary door in cold storage applications.**



 Chase Doors

**AIRGARD® 200**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift

**APPLICATIONS:** Industrial & Commercial, Secondary Cooler & Freezer

**DOOR BODY:** Constructed of two layers of abrasion-resistant, textured PVC laminated back to back, two rows of flexible horizontal stays, 3" center overlap, balloon jamb edge seals, top and bottom wipers.

**WINDOW:** Type 50, centered in each panel

**HINGE:** Top Mounted Gravity Hinge

**AVAILABLE OPTIONS:** Window Options, Impact / Kick Plates, Hinge & Color Options

**\*only to be used as a secondary door in cold storage applications.**



 Chase Doors

**AIRGARD® 300**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift

**APPLICATIONS:** Industrial & Commercial, Secondary Cooler & Freezer

**DOOR BODY:** Constructed of layers of bonded two-ply "belting" material, two rows of flexible horizontal stays, low temp applications to -30°F, 3" center overlap, 2" balloon jamb edge seals, top and bottom wipers, Forest Green only.

**WINDOW:** Type 50, centered in each panel

**HINGE:** Top Mounted Gravity Hinge

**AVAILABLE OPTIONS:** Window Options, Impact / Kick Plates, Hinge Options

**\*only to be used as a secondary door in cold storage applications.**



 Chase Doors

**AIRGARD® 973**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift

**APPLICATIONS:** Industrial & Commercial, Secondary Cooler & Freezer

**DOOR BODY:** Constructed with a .160" thick PVC door body and a two-ply vinyl coated nylon bracket pocket. 3" overlap at the center on bi-parting doors provides a noise and temperature barrier. 48" high USDA accepted textured vinyl impact plates (both sides)

**WINDOW:** Extra large viewing area

**HINGE:** Top Mounted Gravity Hinge

**AVAILABLE OPTIONS:** Window Options, Impact / Kick Plates, Hinge & Color Options

**\*only to be used as a secondary door in cold storage applications.**





 Chase Doors

**AIRGARD® UNI-FLEX 240**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift  
**APPLICATIONS:** Industrial & Commercial, Secondary Cooler & Freezer  
**DOOR BODY:** Constructed of two layers of .120" laminated PVC with a total thickness of .240", embossed finish, 3" center overlap  
**WINDOW:** Type 50 centered in each panel  
**HINGE:** Top Mounted Gravity Hinge  
**AVAILABLE OPTIONS:** Window Options  
**\*only to be used as a secondary door in cold storage applications.**



 Chase Doors

**DURULITE® INDUSTRIAL CC1875**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift  
**APPLICATIONS:** Retail & Supermarket, Industrial & Commercial, Secondary Cooler & Freezer, Washdown  
**DOOR BODY:** 1-7/8" Overall thickness, 1/4" thick rotationally molded polyethylene skin retains properties to -40°F, leading & back edge internal reinforcement & gasket, upper & lower hinge adapters, stainless steel spine  
**WINDOW:** 1/8" polycarbonate, black frame  
**HINGE:** V-Cam Hinge System  
**AVAILABLE OPTIONS:** Custom Sizes Available, 180° x 90° Hardware, Teardrop Bumpers, Impact / Kick Plates, Lower Hinge Guards, Spring Assist, Locking Devices, Window Options  
**\*only to be used as a secondary door in cold storage applications.**



 Chase Doors

**DURULITE® INDUSTRIAL**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift  
**APPLICATIONS:** Retail & Supermarket, Industrial & Commercial, Secondary Cooler & Freezer, Washdown  
**DOOR BODY:** 1-7/8" Overall thickness, 1/4" thick rotationally molded polyethylene skin retains properties to -40°F, upper & lower hinge adapters, leading & back edge internal reinforcement & gasket  
**WINDOW:** 1/8" polycarbonate, black frame  
**HINGE:** V-Cam Hinge System  
**AVAILABLE OPTIONS:** 180° x 90° Hardware, Teardrop Bumpers, Impact / Kick Plates, Lower Hinge Guards, Spring Assist, Locking Devices, Window Options  
**OTHER:** NSF Certified  
**\*only to be used as a secondary door in cold storage applications.**



 Chase Doors

**DURULITE® SERIES 200**

**TRAFFIC:** Pedestrian, Push Cart, Pallet Jack, Forklift  
**APPLICATIONS:** Industrial & Commercial  
**DOOR BODY:** One-piece rotationally molded construction with 1/4" thick rotationally molded polyethylene outer skin, internally reinforced leading / back edges, full perimeter gaskets, upper / lower cane bolts, 2" chain or cable lock sleeves with tamper proof fasteners  
**WINDOW:** Double glazed 1/8" thick polycarbonate recessed vision panels with three security bars spaced on 7" centers.  
**HINGE:** Upper V-Cam Hinge System, lower hinge pillow block construction with UHMW sleeve and solid cast aluminum adapter.  
**AVAILABLE OPTIONS:** 180° x 90° Hardware, Teardrop Bumpers, Impact / Kick Plates, Lower Hinge Guards, Spring Assist, Locking Devices (such as Cane Bolts and Lock Sleeves), Window Options



## FRAMES



### FLUSH HOLLOW METAL FRAMES - DRYWALL OPENINGS (WRAPS WALL)

**CONSTRUCTION:** Reinforced plates located at every hardware mounting point, pre-drilled holes for top hardware, compression anchor (4 total), pre-drilled holes for bottom hardware, pre-drilled holes for fastening frame to door opening (4 total).

**ROUGH OPENING WIDTH** = Finished opening width + 2.75"

**ROUGH OPENING HEIGHT** = Finished opening height + 1"



### FLUSH HOLLOW METAL FRAMES - MASONRY OPENINGS (BUTTS UP TO WALL)

**CONSTRUCTION:** Reinforced plates located at every hardware mounting point, pre-drilled holes for top hardware, pre-drilled holes for fastening frame to door opening, pre-drilled holes for bottom hardware.

**ROUGH OPENING WIDTH** = Finished opening width + 4.5"

**ROUGH OPENING HEIGHT** = Finished opening height + 2.25"



### STRUCTURAL TUBE FRAMES

**CONSTRUCTION:** Pre-drilled holes for top hardware, pre-drilled holes for bottom hardware, pre-drilled hole for fastening frame to door opening (4 total - one in each corner), pre-drilled holes for floor anchors (4 total). Structural steel tubing available in three sizes: 2 x 4, 2 x 6 and 2 x 8.

**ROUGH OPENING WIDTH** = Finished opening width + 4.25"

**ROUGH OPENING HEIGHT** = Finished opening height + 2.1875"



### C-CHANNEL FRAMES

**CONSTRUCTION:** Pre-drilled holes for top hardware, pre-drilled holes for fastening frame to door opening (4 total), pre-drilled holes for bottom hardware, pre-drilled holes for floor anchors (4 total)

**ROUGH OPENING WIDTH** = Finished opening width + 1.25"



**ROUGH OPENING HEIGHT** = Finished opening height + .625"

# MEASURING YOUR OPENING

## FINISHED OPENINGS - FOR USE WHEN ORDERING DOOR FOR EXISTING OPENING

The finished opening is the clear opening inside your jamb **after** all finishing, trim and flooring has been completed. If you are replacing an existing door, remember to **always measure the opening - NOT the door**.

1. Measure the height of your opening at each side
2. Measure the width of the opening at the top, middle and bottom to make sure the opening width is constant. If the measurement is not constant (square & plumb), use the smallest measurement so the door will fit properly.
3. For a single door - choose a left or right side hinge from the front of the door (front of door is side facing the customer).

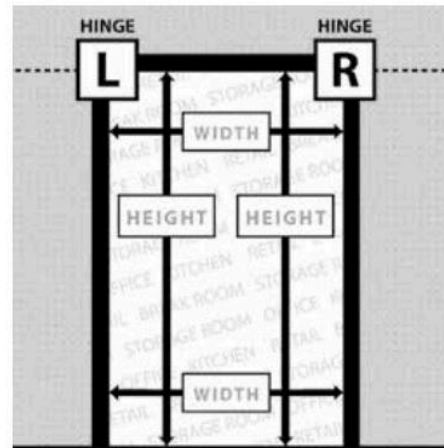
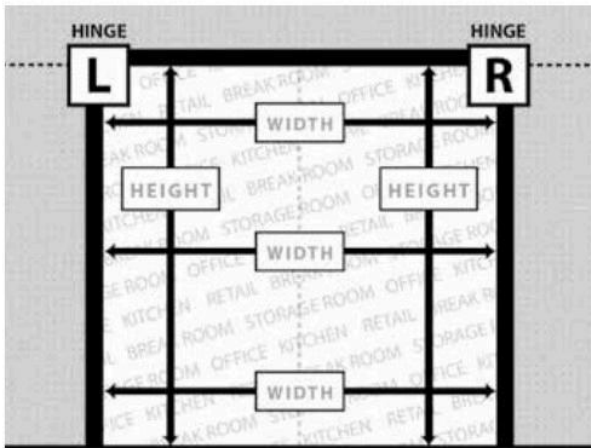


## ROUGH OPENINGS - FOR USE WHEN ORDERING BOTH DOOR AND FRAME

The rough opening is the clear opening inside your wall **before** any trim or finish work has been added. If you are replacing an existing door, remember to **always measure the opening - NOT the door**.

**Note: Allow for flooring if needed.**

1. Measure the height of your opening at each side
2. Measure the width of the opening at the top, middle and bottom to make sure the opening width is constant. If the measurement is not constant (square & plumb), use the smallest measurement so the door will fit properly.
3. For a single door - choose a left or right side hinge from the front of the door (front of door is side facing the customer).

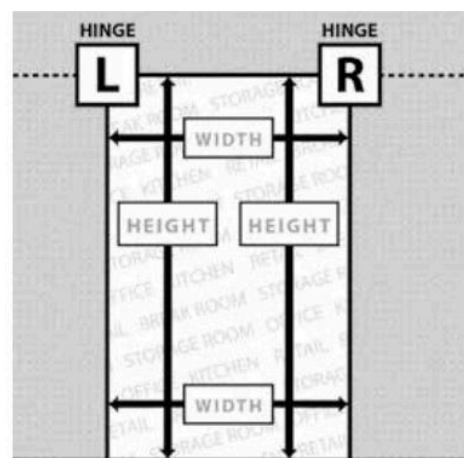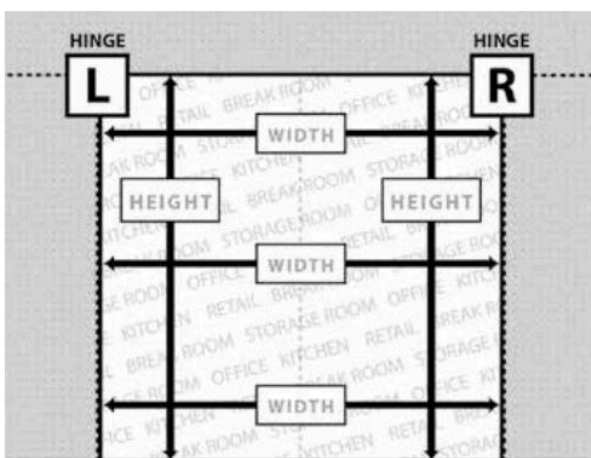

## INDUSTRIES SERVED:



**KITCHEN**



**RESTAURANT**



**RETAIL**



**SUPERMARKET**



**INDUSTRIAL**



**COMMERCIAL**

In our continuing effort to improve, some specifications or descriptions may change. We reserve the right to make changes without notice or recourse.

**w.w.Cannon, Inc.**  
 Design. Layout. Build. Install.  
 1-800-442-3061  
 www.wwcannon.com



SENNECA HOLDINGS  
 11502 CENTURY BLVD. CINCINNATI, OH 45246  
 WWW.SENNECA.COM | SALES@SENNECA.COM | 800.543.4455

BROCHURE #: SENTRAF0420