

Step Over Conveyor Crossovers

Wildeck's Step Over Conveyor Crossover products provide a way for personnel to comfortably and safely step over single or double conveyor configurations. Available as either a Vertical Step Over (for those conveyor layouts pressed for space) or as a Stair Style Step Over (furnished with 9½" deep treads), Wildeck's Step Over Conveyor Crossover products provide a designated access point for easily maneuvering around a facility's conveyor belts.

Vertical Step Over (VSO) Crossover

Now vertically and horizontally adjustable!

Wildeck's Vertical Step Over Conveyor Crossover allows personnel to comfortably and safely step over single or double conveyor configurations or other material handling/automated systems. Constructed with 1½" diameter steel tube for a safe and stable climbing experience, Wildeck's Vertical Step Over (VSO) has diamond plate rung caps and a diamond plate top tread (optional serrated rung caps and treads available). A center step (optional) is available for crossing multiple conveyors.

Highlights

- Improve access and mobility around material handling/automated systems
- Economical design with minimal footprint
- Adjustable height on all (8) feet (up to 6")
- Cut-to-width flexibility on horizontal clear

Vertical Step Over (VSO) Specifications

- Frame: 1½" diameter steel tube
- Rung Caps: 1½" x 24" 14-gauge diamond plate



w.w.Cannon, Inc.

Design. Layout. Build. Install.

1-800-442-3061
www.wwcannon.com

- Top Step: 6" x 24" 14-gauge diamond plate
- Footpads: 2" x 4" with 7/16" diameter holes for 3/8" anchors
- Single Conveyor Model: Grab bars are 36" long (trim to fit)
- Double Conveyor Model: Grab bars are 57" long (trim to fit)
- Horizontal Clear: Trim in field to required length
- Vertical Height: Adjustable height range of up to 6"
- Capacity: 500 lbs. (top step)
-

Vertical Step Over (Single Conveyor)

Model	Max. Top Step Height (Conveyor Height)	Max. Horizontal Clearance	Weight : 24" Wide Treads
VSO-ADJ-2648-24DP-HC36	26"	48"	79 lbs.
VSO-ADJ-3248-24DP-HC36	32"	48"	87 lbs.
VSO-ADJ-3848-24DP-HC36	38"	48"	91 lbs.
VSO-ADJ-4448-24DP-HC36	44"	48"	99 lbs.
VSO-ADJ-5048-24DP-HC36	50"	48"	103 lbs.
VSO-ADJ-5648-24DP-HC36	56"	48"	111 lbs.

Vertical Step Over (Double Conveyor)


Model	Max. Top Step Height (Conveyor Height)	Max. Horizontal Clearance	Weight: 24" Wide Treads
VSO-ADJ-2672-24DP-HC36	26"	72"	103 lbs.

Model	Max. Top Step Height (Conveyor Height)	Max. Horizontal Clearance	Weight: 24" Wide Treads
VSO-ADJ-3272-24DP-HC36	32"	72"	111 lbs.
VSO-ADJ-3872-24DP-HC36	38"	72"	115 lbs.
VSO-ADJ-4472-24DP-HC36	44"	72"	123 lbs.
VSO-ADJ-5072-24DP-HC36	50"	72"	127 lbs.
VSO-ADJ-5672-24DP-HC36	56"	72"	135 lbs.

Stair Style Step Over (SPOVER) Crossover

Stair Style Step Over Specifications

- Frame: 1½" diameter steel tube
- Steps: 9½" deep treads with diamond plate or safety grating
- Hole Anchoring: 9/16"
- Freestanding (bolts to floor – no conveyor mounting necessary)
- 36" cut to fit handrails provided
- Tread Plates: 14-gauge diamond plate 1¼" x 3½"
- 36" cut to fit handrails included (trim in field to required length)

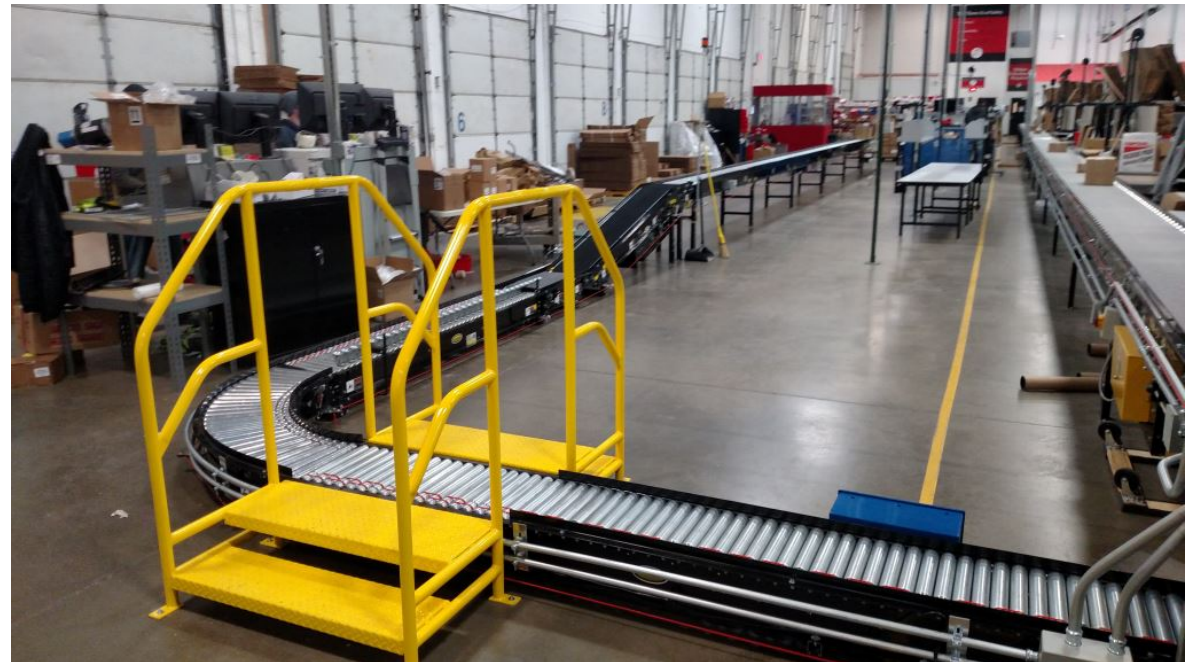

Stair Style Step Over (Single Conveyor)

Model	Max. Top Step Height (Conveyor Height)	Max. Horizontal Clearance	Weight: 24" Wide Treads	Weight: 36" Wide Treads
CO-SPOVR-1948-24DP	19"	48"	129 lbs.	149 lbs.
CO-SPOVR-2848-24DP	28-1/2"	48"	176 lbs.	206 lbs.
CO-SPOVR-3848-24DP	38"	48"	237 lbs.	278 lbs.
CO-SPOVR-4748-24DP	47-1/2"	48"	298 lbs.	350 lbs.

Stair Style Step Over (Double Conveyor)

Model	Max. Top Step Height (Conveyor Height)	Max. Horizontal Clearance	Weight: 24" Wide Treads	Weight: 36" Wide Treads
CO-SPOVR-1972-24DP	19"	72"	134 lbs.	154 lbs.
CO-SPOVR-2872-24DP	28-1/2"	72"	181 lbs.	211 lbs.
CO-SPOVR-3872-24DP	38"	72"	242 lbs.	283 lbs.
CO-SPOVR-4772-24DP	47-1/2"	72"	303 lbs.	303 lbs.

