Coil Lifters & Upenders / Two-Sided

Design. Layout. Build. Install. 1-800-442-3061 wwcannon.com

Model 84


Telescoping Coil Lifter

Choose Hand Wheel Leg Drive or Motorized Leg Drive.

Product Features:

- Chain wheel provides easy manual operation
- Two-sided coil lifter requires less aisle space
- · Curved lifting pad minimizes coil damage
- Self-locking worm gear prevents legs from inadvertent opening
- · Hand Wheel Leg Drive and Motorized Leg Drive options available
- Complies with ASME standards





Model Number	Capacity (tons)	Dimensions (inches)												
		Coil Width		Thurst	HR	Bail				Foot				Weight (lbs.)
		Min.	Max.	Throat	Headroom	Α	В	С	Т	D	F	L	W	(103.)
84-5-48 84-5-60	5	16 20	48 60	28 26	52 50	2	4	7	1	4-1/2	4	3-1/2	7-1/2	485 590
84-10-48 84-10-60	10	16 20	48 60	32 30	63 61	2	4	7	1-1/4	5-1/2	4	4	9-1/2	725 810
84-15-60 84-15-72	15	20 24	60 72	34 32	69 67	2-1/2	5	9	1-1/2	6-1/2	4	4	9	930 1075

Other sizes available, consult factory.


Model 86

Double-Leg Coil Lifter

New and improved design makes this versatile lifter a great option for coil lifts where aisle space is tight. Plus, it's much more adjustable to provide simple, affordable, efficient lifts for a variety of coil sizes.

Product Features:

- · Most budget-friendly of the two-sided coil lifters
- Narrower, thicker hook lets you get in tighter spaces
- New rounded corners on the hook's shoes won't "catch" on load when sliding over coil exterior, preventing damage
- Easily adjustable to handle multiple coil sizes with ease
- Extra long link pins with hand guards eliminate pinch points, preventing user injuries when setting hook width
- · Hooks manufactured of high-tensile alloy steel
- Complies with ASME standards

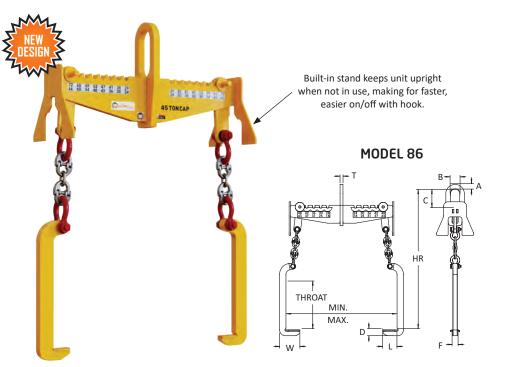

Model Number	Capacity (tons)	Dimensions (inches)												
		Coil Width		Threat	HR	Bail				Foot				Weight (lbs.)
		Min.	Max.	Throat	Headroom	Α	В	С	T	D	F	L	W	(103.)
86-10-48	10	20	48	24	58	2	4	7	1-1/4	3-1/4	4	7	9-1/2	210
86-15-48	15	20	48	28	66	2-1/2	5	9	1-1/2	3-1/2	4	7	10-7/8	352
86-20-60	20	24	60	30	82	2-1/2	5	9	1-1/2	3-5/16	4	6	9-5/8	760
86-25-60	25	24	60	32	94	2-3/4	6	12	2-1/4	4-3/4	4	8	13-5/8	1235
86-30-72	30	24	72	26	83	3-1/2	7	16	2-1/4	4-3/4	4	8	14-3/4	1170

Other sizes available, consult factory

