

# Model 22

## Heavy-Duty Twin Basket Sling Lifting Beam


**w.w.Cannon, Inc.**  
 Design. Layout. Build. Install.  
 1-800-442-3061  
 www.wwcannon.com



**Product Features:**

- Designed to be used with slings in a basket hitch
- Specially designed hooks with hook latches minimize potential sling damage
- Two sets of fixed hooks are standard in all lengths over 4'
- The inner set of hooks (S2) are 1/2 the overall spread
- Extra spreads and custom locations available upon request
- Complies with ASME standards

**MODEL 22**

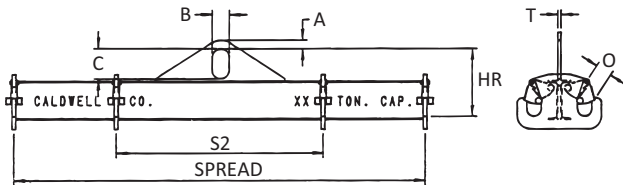

Model Number HR Headroom (in.) Weight (lbs.)	Spread (feet)												Other Dimensions (in.)	
	3	4	6	8	10	12	14	16	18	20	24	30		
<b>1/2 Tons Capacity</b>														
Model Number	22-1/2-3	22-1/2-4	22-1/2-6	22-1/2-8	22-1/2-10	22-1/2-12	22-1/2-14	22-1/2-16	22-1/2-18	22-1/2-20	22-1/2-24	22-1/2-30	A=7/8	T=3/4
HR Headroom	8-1/2	8-1/2	8-1/2	8-1/2	9-1/2	9-1/2	10-1/2	10-1/2	11-1/2	11-1/2	12-1/2	13-1/2	B=3	O=1-1/16
Weight	50	65	110	150	200	220	298	331	424	463	627	855	C=5	
<b>1 Tons Capacity</b>														
Model Number	22-1-3	22-1-4	22-1-6	22-1-8	22-1-10	22-1-12	22-1-14	22-1-16	22-1-18	22-1-20	22-1-24	22-1-30	A=7/8	T=3/4
HR Headroom	8-1/2	8-1/2	9-1/2	10-1/2	10-1/2	11-1/2	11-1/2	12-1/2	13-1/2	13-1/2	15-1/2	15-1/2	B=3	O=1-1/8
Weight	50	65	145	210	230	290	338	390	539	588	907	1150	C=5	
<b>2 Tons Capacity</b>														
Model Number	22-2-3	22-2-4	22-2-6	22-2-8	22-2-10	22-2-12	22-2-14	22-2-16	22-2-18	22-2-20	22-2-24	22-2-30	A=7/8	T=3/4
HR Headroom	9-1/2	10-1/2	10-1/2	11-1/2	12-1/2	13-1/2	13-1/2	14-1/2	15-1/2	15-1/2	17-1/2	20-1/2	B=3	O=1-1/8
Weight	70	90	160	225	300	375	447	515	725	815	1221	2272	C=5	
<b>5 Tons Capacity</b>														
Model Number	22-5-3	22-5-4	22-5-6	22-5-8	22-5-10	22-5-12	22-5-14*	22-5-16*	22-5-18*	22-5-20*	22-5-24*	22-5-30*	A=2	T=1
HR Headroom	13-1/2	14-1/2	15-1/2	16-1/2	16-1/2	16-1/2	19	19-1/2	22-1/2	22-1/2	22-1/2	25-1/2	B=4	T=1-1/4*
Weight	90	160	275	350	450	500	854	940	1398	1650	2144	2330	C=7	O=1-1/8
<b>7-1/2 Tons Capacity</b>														
Model Number	22-7 1/2-3	22-7 1/2-4	22-7 1/2-6	22-7 1/2-8	22-7 1/2-10	22-7 1/2-12	22-7 1/2-14	22-7 1/2-16	22-7 1/2-18	22-7 1/2-20	22-7 1/2-24	22-7 1/2-30	A=2	T=1-1/4
HR Headroom	14-1/2	15-1/2	16-1/2	17-1/2	17-1/2	19-1/2	22-1/2	22-1/2	22-1/2	22-1/2	25-1/2	25-1/2	B=4	O=1-3/4
Weight	155	180	330	410	500	700	1162	1300	1468	1606	2354	2877	C=7	
<b>10 Tons Capacity</b>														
Model Number	22-10-3	22-10-4	22-10-6	22-10-8	22-10-10	22-10-12	22-10-14	22-10-16	22-10-18	22-10-20	22-10-24	22-10-30	A=2	T=1-1/4
HR Headroom	15-1/2	16-1/2	17-1/2	19-1/2	22-1/2	19-1/2	22-1/2	22-1/2	25-1/2	25-1/2	25-1/2	25-1/2	B=4	O=1-3/4
Weight	150	200	360	500	850	1000	1147	1299	1741	1943	2335	2962	C=7	
<b>15 Tons Capacity</b>														
Model Number	22-15-3	22-15-4	22-15-6	22-15-8	22-15-10	22-15-12	22-15-14	22-15-16	22-15-18	22-15-20	22-15-24	22-15-30	A=2-1/2	T=1-1/2
HR Headroom	18-1/2	19-1/2	21-1/2	21-1/2	24-1/2	27-1/2	27-1/2	27-1/2	27-1/2	27-1/2	27-1/2	30	B=5	O=4
Weight	397	471	970	1240	1256	1980	2065	2100	2391	2584	4045	4100	C=9	
<b>20 Tons Capacity</b>														
Model Number	22-20-3	22-20-4	22-20-6	22-20-8	22-20-10	22-20-12	22-20-14	22-20-16	22-20-18	22-20-20	22-20-24	22-20-30	A=2-1/2	T=1-1/2
HR Headroom	19-1/2	21-1/2	21-1/2	24-1/2	24-1/2	24-1/2	27-1/2	27-1/2	27-1/2	27-1/2	31	31	B=5	O=4
Weight	253	328	910	1000	1150	1740	1935	2210	2480	2755	3500	4500	C=9	

Model 22G - custom designed lifter with segmented sling saddle on the top of the beam can further reduce beam headroom and increased sling spread adjustment.

**Model 22G:** Choose a custom designed lifter with a segmented sling saddle on the top of the beam to further reduce headroom and increase spread adjustments.

