


Model SCP


Locking, Screw Type

The Model SCP clamp is capable of handling steel plate from horizontal to vertical to horizontal through a 180° arc and may be used for handling plate at rolling and forming machines. These clamps feature a spring loaded pivoting cam jaw that "cams in" when a load is applied to the lifting shackle. Clamp is capable of handling plate horizontally when used in pairs or sets of pairs, or in a tripod arrangement.



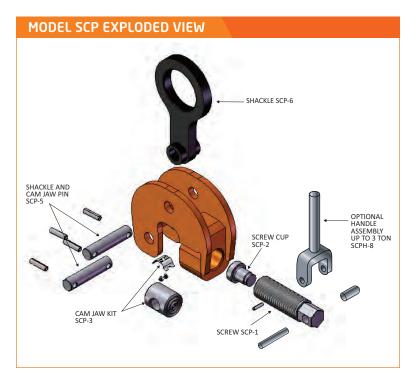

Heavy-duty screw-clamp version of the Model RSC.



MODEL SCP SPECIFICATIONS (in inches)

	Part Number	Plate Thickness A	В	С	D	E	F	G	Н	J	K	L	Weight (lbs.)	
	1/2 Tons Capac	1/2 Tons Capacity												
	SCP-00.50-A	0 – 3/4	2-3/8	4-1/2	9	2-3/8	6-5/8	2-3/8	1-7/8	1/2	1-1/2	ı	7	
	1-1/2 Tons Cap	-1/2 Tons Capacity												
СК	SCP-01.50-A	0 - 1-1/4	2-7/8	5-1/2	10-9/16	2-5/8	8-7/16	3-3/8	2-3/8	5/8	1-3/4	8-1/4	13	
	3 Tons Capacity													
CK	SCP-03.00-A	0 – 2	3-1/8	5-3/4	12	2-3/8	10-13/16	4-1/16	2-13/16	3/4	2	8-5/8	19	
	6 Tons Capacity													
	SCP-06.00-A	0 – 2-1/2	4-5/16	7-9/16	14-3/8	3	14-3/8	5-3/8	3-7/16	1	2-15/16	-	44	
	10 Tons Capacity													
	SCP-10.00-A	0 – 3	5-1/2	9-3/4	19-1/4	3-1/4	16-3/8	6-3/4	4-3/8	1	3-1/8	-	93	
	15 Tons Capacity													
	SCP-15.00-A	0 – 4	7-1/4	12-1/8	22-7/8	3-3/4	21-1/2	8-1/4	5-9/16	1-1/4	4	-	210	

20, 30, 50, 100 and 150 Ton capacities available upon request. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

